




1 2 3 4 5 6 7 8

F

F

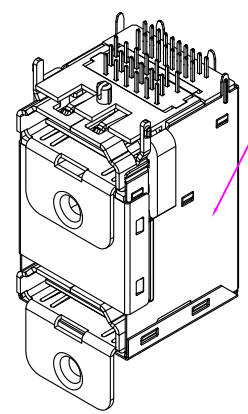

OUTSIDE SHIELD

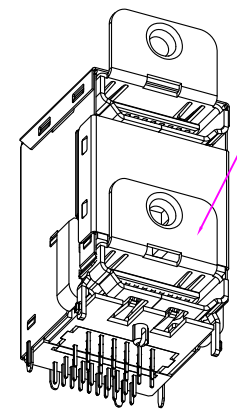

INSIDE SHIELD

MATERIALS





HOUSING: LCP (UL 94V-0)
 OUTSIDE SHIELD: SUS, NICKEL PLATING
 INSIDE SHIELD: SUS, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -20°C~+85°C

E

E

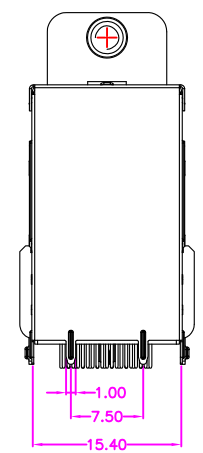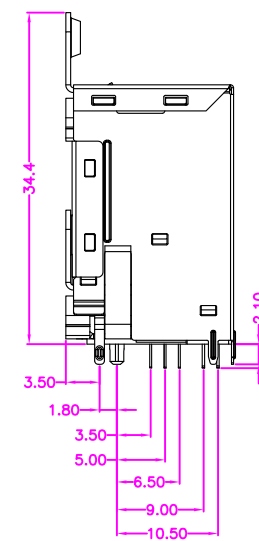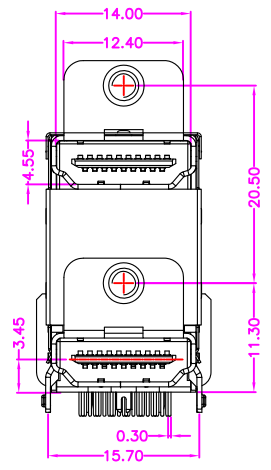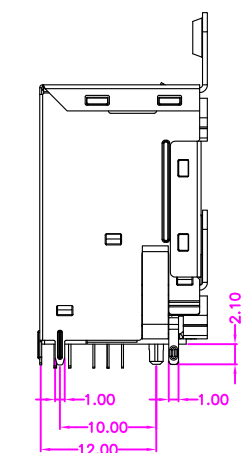

PART NUMBER:

2HDUD - 3 8 * T - 1 1 0

SERIES ——— NO. OF POS. ——— TIN PLATING ON SOLDER TAIL ——— TRAY PACKAGE

CONTACT PLATED OPTION



- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD

C

C

B

B

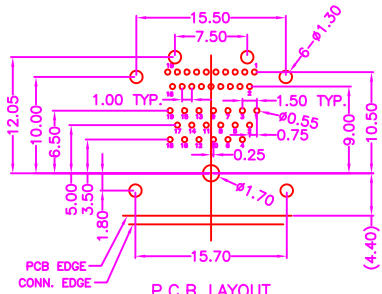

P.C.B LAYOUT TOP VIEW ±0.05

A

A

A	RELEASE	2011.10.3
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES		HDMI CONNECTOR SERIES				
X.X ±0.3	TITLE	DUAL HDMI, PCB MOUNT, R/A, METAL SHIELD, FEMALE WITH EAR & SCREW & POST				
X.XX ±0.2		DRAWN BY	CHECKED BY	APPROVED BY		
X.XXX ±0.1		<i>Janice</i>	<i>Lion</i>	<i>Benson</i>		
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10078	MM	NONE	A4	2HDUD-001	A 1/1

1 2 3 4 5 6 7 8