


MATERIALS
 HOUSING: THERMOPLASTIC (UL 94V-0)
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION
 CURRENT RATING: 1.1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

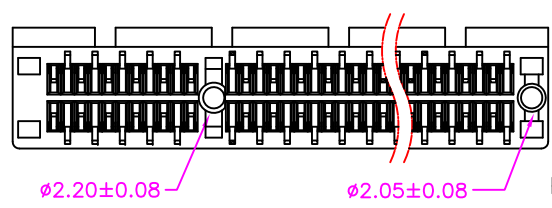

PART NUMBER:
 4CEE^B - * * * T - 1 1 1 * *

SERIES ————
 NO. OF POS. REF. TABLE 1 ————
 CONTACT PLATED OPTION ————
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD

HOUSING COLOR OPTION
 BLANK: BLACK
 W: WHITE

"F" LENGTH OPTION
 1: 2.30mm
 2: 2.54mm
 3: 3.10mm

TRAY PACKAGE ————
 TIN PLATING ON SOLDER TAIL ————

CABLE 1

DIMENSIONS					
POS.	A	B	C	D	E
36	25.00	9.15	7.65	6.00	8.15
64	39.00	23.15	21.65	20.00	22.15
98	56.00	40.15	38.65	37.00	39.15
164	89.00	73.15	71.65	70.00	72.15

A	RELEASE	2011.9.19
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	CARD EDGE CONNECTOR SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, VERTICAL, FEMALE, 1 KEY, WITH POST				
	DRAWN BY	CHECKED BY	APPROVED BY		
	<i>Janice</i>	<i>Lion</i>	<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV.
	MM	NONE	A4	4CEE ^B -002	A
					Sheet
					1/1