


PAD AREA
 KEEP AREA
 KEEP OUT AREA

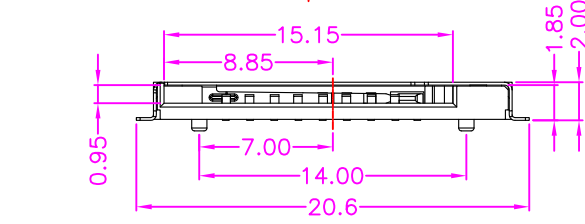

| Connector POS. NO. | DESCRIPTION |
|--------------------|------------------------------|
| Pin 1 | VCC:PWR signal and GND |
| Pin 2 | RST:Reset signal |
| Pin 3 | CLK:Clocking signal |
| Pin 4 | Reserved |
| Pin 5 | VCC:PWR signal and GND |
| Pin 6 | VPP:Porgramming Voltage |
| Pin 7 | I/O:Serial date input/output |
| Pin 8 | Reserved |

PART NUMBER:
4MCGD - 0 9 * T - 1 2 1
 SERIES: 4MCGD
 NO. OF POS.: 9
 CONTACT PLATED OPTION: *
 TAPE REEL PACKAGE: T
 TIN PLATING ON SOLDER TAIL: 1 2 1


1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

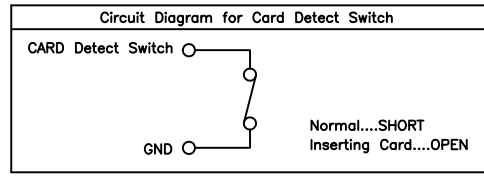

| A | RELEASE | 2011.10.25 |
|------|-------------|------------|
| REV. | DESCRIPTION | DATE |
| | | |

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

| TOLERANCES | | MEMORY CARD SERIES | | | | | |
|------------|------|--------------------|--|-------------|----------|-----------|-------|
| X.X | ±0.3 | TITLE | SIM CARD, 8PIN, PCB MOUNT, SMT, METAL SHIELD PUSH-PUSH TYPE, FEMALE | | | | |
| X.XX | ±0.2 | DRAWN BY | CHECKED BY | APPROVED BY | | | |
| X.XXX | ±0.1 | Janice | Lion | Benson | | | |
| Angle | ±5° | UNIT | SCALE | SIZE | DRAW NO. | REV. | Sheet |
| | | 10084 | MM | NONE | A4 | 4MCGD-002 | A 1/1 |