

P.C.B LAYOUT  
TOP VIEW ±0.05

POS.	Dimension			POS.	Dimension		
	A	B	C		A	B	C
04	8.64	3.81	1.27	38	30.23	25.40	22.86
06	9.91	5.08	2.54	40	31.50	26.67	24.13
08	11.18	6.35	3.81	42	32.77	27.94	25.40
10	12.45	7.62	5.08	44	34.04	29.21	26.67
12	13.72	8.89	6.35	46	35.31	30.48	27.94
14	14.99	10.16	7.62	48	36.58	31.75	29.21
16	16.26	11.43	8.89	50	37.85	33.02	30.48
18	17.53	12.70	10.16	52	39.12	34.29	31.75
20	18.80	13.97	11.43	54	40.39	35.56	33.02
22	20.07	15.24	12.70	56	41.66	36.83	34.29
24	21.34	16.51	13.97	60	44.20	39.37	36.83
26	22.61	17.78	15.24	80	56.90	52.07	49.53
28	23.88	19.05	16.51	128	87.38	82.55	80.01
30	25.15	20.32	17.78	160	107.70	102.87	100.33
32	26.42	21.59	19.05				
34	27.69	22.86	20.32				
36	28.96	24.13	21.59				

TABLE 1


MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), WHITE  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -55°C~+105°C

PART NUMBER:

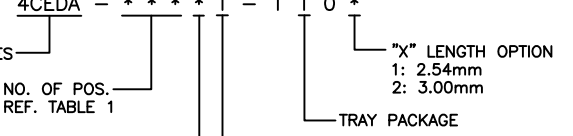

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD

TIN PLATING ON SOLDER TAIL

**Cyberconn Technology Co., Ltd.**  
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES		CARD EDGE CONNECTOR SERIES			
X.X ±0.3	TITLE	CARD EDGE, 1.27mm PITCH, PCB MOUNT, VERTICAL, FEMALE			
X.XX ±0.2		DRAWN BY	CHECKED BY	APPROVED BY	
X.XXX ±0.1		<i>Janice</i>	<i>Lion</i>	<i>Benson</i>	
Angle ±5°		UNIT	SCALE	SIZE	DRAW NO.
		10033	MM	NONE	A4
		REV.	Sheet	4CEDA-001	A 1/1

A	RELEASE	2011.9.30
REV.	DESCRIPTION	DATE