


SECTION A-A

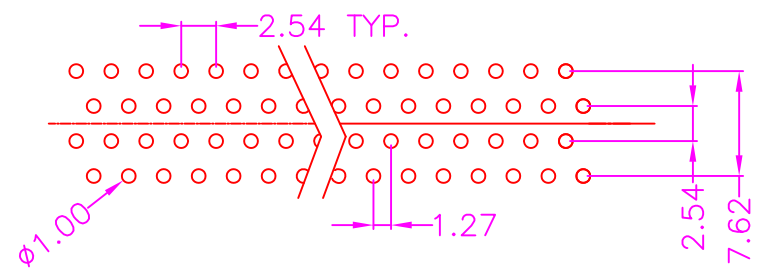

P.C.B LAYOUT TOP VIEW ±0.05

POS.	Dimension			POS.	Dimension		
	A	B	C		A	B	C
04	8.64	3.81	1.27	40	31.50	26.67	24.13
06	9.91	5.08	2.54	42	32.77	27.94	25.40
08	11.18	6.35	3.81	44	34.04	29.21	26.67
10	12.45	7.62	5.08	46	35.31	30.48	27.94
12	13.72	8.89	6.35	48	36.58	31.75	29.21
14	14.99	10.16	7.62	50	37.85	33.02	30.48
16	16.26	11.43	8.89	52	39.12	34.29	31.75
18	17.53	12.70	10.16	54	40.39	35.56	33.02
20	18.80	13.97	11.43	56	41.66	36.83	34.29
22	20.07	15.24	12.70	58	42.93	38.10	35.56
24	21.34	16.51	13.97	60	44.20	39.37	36.83
26	22.61	17.78	15.24	80	56.90	52.07	49.53
28	23.88	19.05	16.51	100	69.60	64.77	62.23
30	25.15	20.32	17.78	120	82.30	77.47	74.93
32	26.42	21.59	19.05	124	84.84	80.01	77.47
34	27.69	22.86	20.32	140	95.00	90.17	87.63
36	28.96	24.13	21.59	182	121.67	116.84	114.30
38	30.23	25.40	22.86				

TABLE 1

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), WHITE  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -55°C~+105°C

PART NUMBER:

4CEDA - \* \* \* \* T - 1 1 1

SERIES ————  
 NO. OF POS. ————  
 REF. TABLE 1 ————  
 TRAY PACKAGE ————  
 TIN PLATING ON SOLDER TAIL ————

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD

<p><b>Cyberconn Technology Co., Ltd.</b>          www.cyberconn.com.tw Tel:+886-3-4951314</p>						
TOLERANCES		CARD EDGE CONNECTOR SERIES				
X.X ±0.3		TITLE CARD EDGE, 1.27mm PITCH, PCB MOUNT, VERTICAL, FEMALE, END KEY				
X.XX ±0.2						
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		<i>Janice</i>		<i>Lion</i>		<i>Benson</i>
		UNIT	SCALE	SIZE	DRAW NO.	REV.
		10033	MM	NONE	A4	4CEDA-002

A	RELEASE	2011.10.18
REV.	DESCRIPTION	DATE