
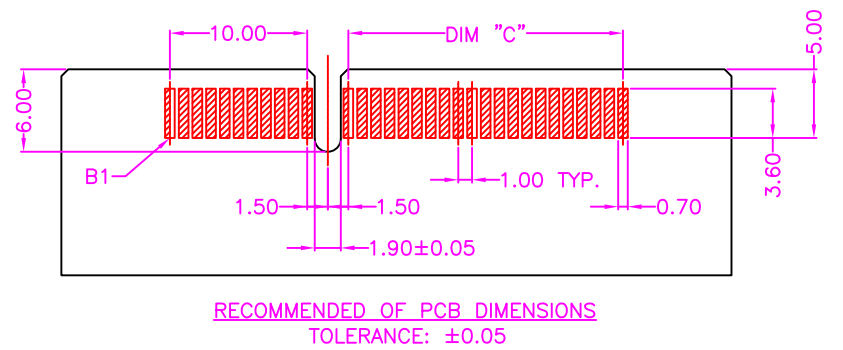

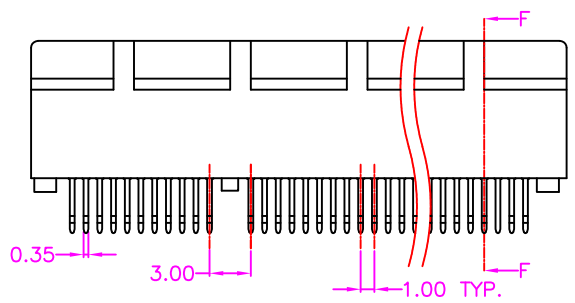
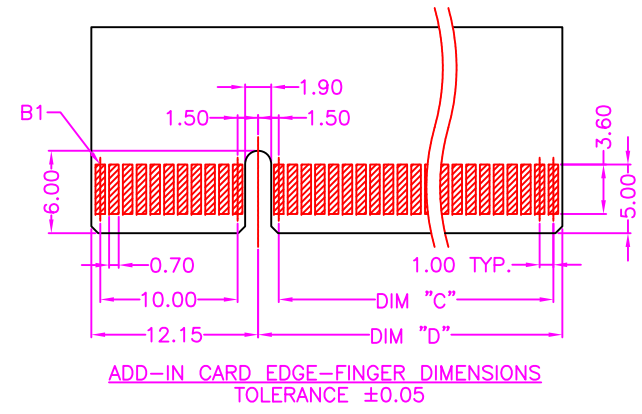
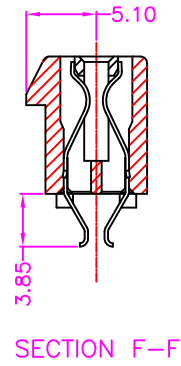


1 2 3 4 5 6 7 8

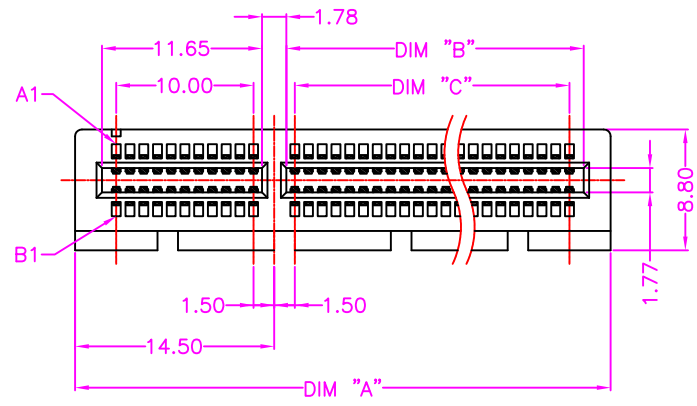

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

CABLE 1

DIMENSIONS				
POS.	A	B	C	D
36	25.00	7.65	6.00	8.15
64	39.00	21.65	20.00	22.15
98	56.00	38.65	37.00	39.15
164	89.00	71.65	70.00	72.15

PART NUMBER:

4CEEL - * * * T - 1 1 0 *

SERIES
 NO. OF POS. REF. TABLE 1
 CONTACT PLATED OPTION
 1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 HOUSING COLOR OPTION
 BLANK: BLACK
 W: WHITE
 TRAY PACKAGE
 TIN PLATING ON SOLDER TAIL

A	RELEASE	2011.12.11
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	CARD EDGE CONNECTOR SERIES				
X.X ±0.3	TITLE PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, STRADDLE FEMALE, 1 KEY				
X.XX ±0.2	DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1	Janice		Lion		Benson
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10033	MM	NONE	A4	4CEEL-001
					Sheet
					1/1

1 2 3 4 5 6 7 8