
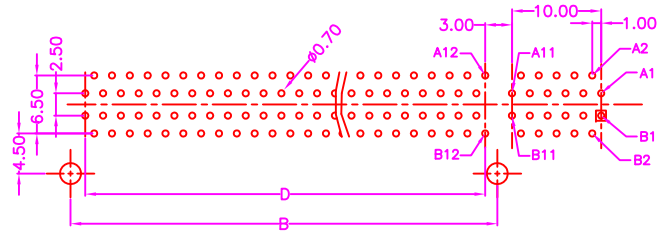
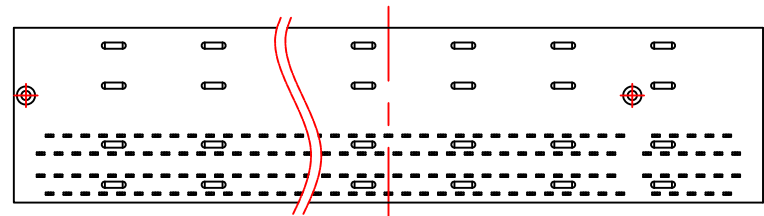
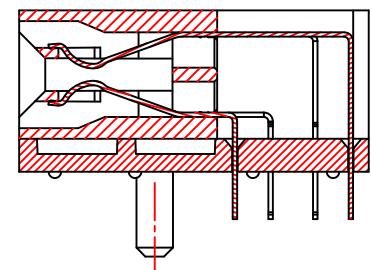



MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.1 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE:  $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$

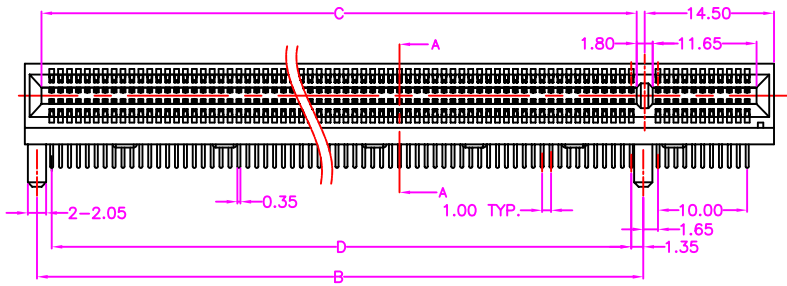

P.C.B LAYOUT TOP VIEW  $\pm 0.05$

PART NUMBER:  
 4CEEI - \* \* \* T - 1 1 0 \*

SERIES ————  
 NO. OF POS. ————  
 REF. TABLE 1

CONTACT PLATED OPTION ————  
 1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

"E" LENGTH OPTION  
 1: 2.30mm  
 2: 3.10mm  
 3: 3.56mm

TRAY PACKAGE ————  
 TIN PLATING ON SOLDER TAIL ————

TABLE 1

89.00	73.00	71.75	70.00	164
56.00	40.00	38.75	37.00	98
39.00	23.00	21.75	20.00	64
25.00	9.00	7.75	6.00	36
20.00	4.00	2.75	1.00	26
DIM A	DIM B	DIM C	DIM D	POSITION NUMBER

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	CARD EDGE CONNECTOR SERIES				
X.X $\pm 0.3$	TITLE				
X.XX $\pm 0.2$	PCI EXPRESS, 1.00mm PITCH, PCB MOUNT, R/A				
X.XXX $\pm 0.1$	FEMALE, 1 KEY, WITH POST				
Angle $\pm 5^{\circ}$	DRAWN BY	CHECKED BY	APPROVED BY		
	Janice	Lion	Benson		
	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10033	MM	NONE	A4	4CEEI-001
					Sheet
					1/1

A	RELEASE	2012.3.2
REV.	DESCRIPTION	DATE