
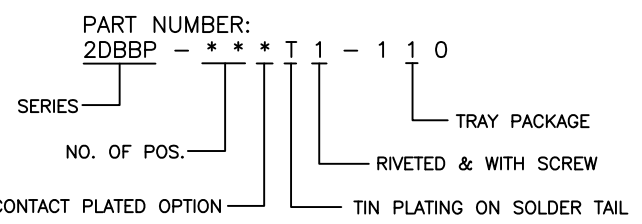


MATERIALS


HOUSING: PBT (UL 94V-0), BLUE  
 SHELL: SPCC, TIN PLATING  
 SCREW: COPPER ALLOY, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 5 AMP MAX  
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -55°C~+105°C

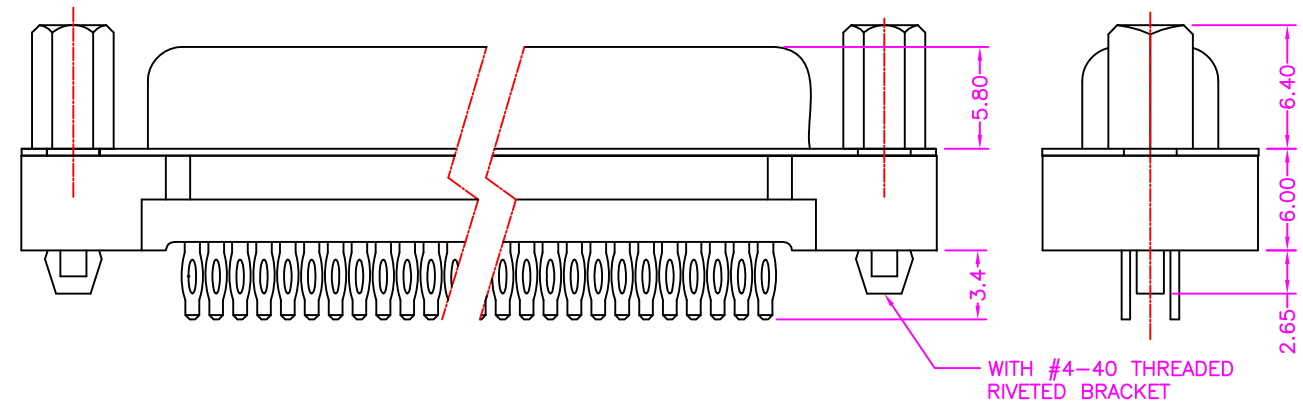

CONTACT PLATED OPTION:  
 1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

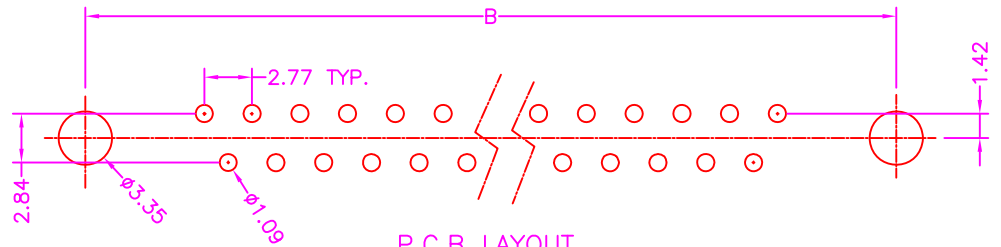

Position	Dimension		
	A	B	C
09	30.81	24.99	16.33
15	39.14	33.32	24.66
25	53.04	47.04	38.38
37	69.32	63.50	54.84

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel: +886-3-4951314

TOLERANCES	D-SUB CONNECTOR SERIES				
X.X ±0.3	D-SUB, PCB MOUNT, VERTICAL, METAL SHIELD FEMALE, PRESS FIT TYPE, SCREW ASSEMBLY				
X.XX ±0.2	TITLE	DRAWN BY		CHECKED BY	APPROVED BY
X.XXX ±0.1		Janice		Lion	Benson
Angle ±5°					
	UNIT	SCALE	SIZE	DRAW NO.	REV.
	MM	NONE	A4	2DBBP-001	A
					Sheet
					1/1

A	RELEASE	2011.7.18
REV.	DESCRIPTION	DATE