
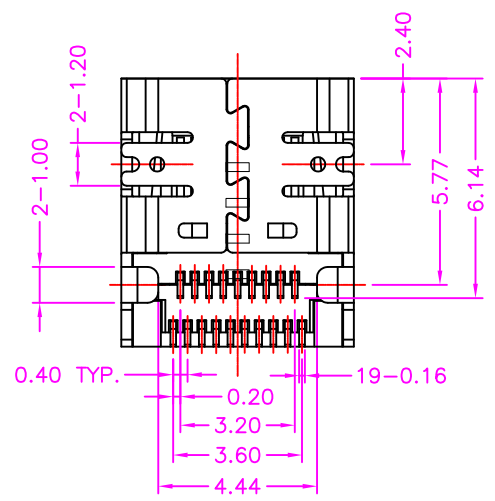
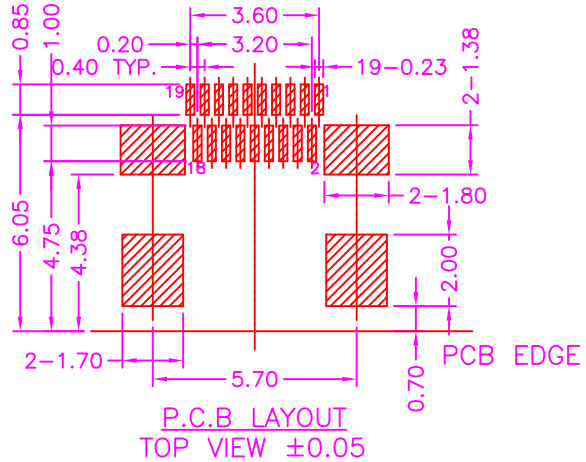
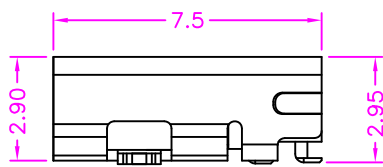


PART NUMBER:
2HDLA - 1 9 * - 1 2 0

SERIES ————
 NO. OF POS. ————
 CONTACT PLATED OPTION ————

TAPE REEL PACKAGE

1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD



MATERIALS
 HOUSING: LCP (UL 94V-0), BLACK
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION
 CURRENT RATING: 0.8 AMP MAX
 DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 10m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -30°C~+85°C

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	HDMI CONNECTOR SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE	MICRO HDMI, D TYPE, 0.40mm PITCH, PCB MOUNT, SMT, METAL SHIELD, FEMALE WITH MYLAR			
	DRAWN BY	CHECKED BY	APPROVED BY		
	<i>Janice</i>	<i>Lion</i>	<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
	10096	MM	NONE	A4 2HDLA-001	A 1/1

A	RELEASE	2012.5.2
REV.	DESCRIPTION	DATE