

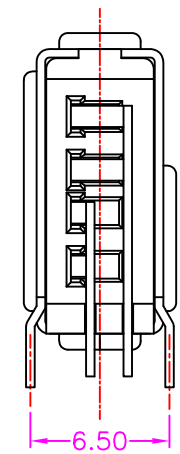
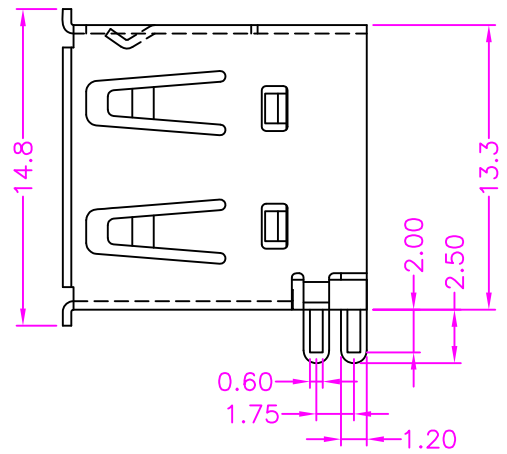


P.C.B. LAYOUT
TOP VIEW ±0.05

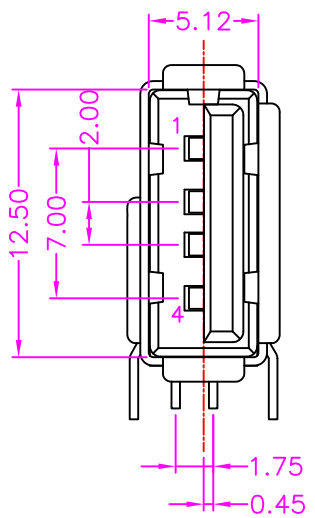

PART NUMBER:
2USAV - 0 4 * T - 1 1 1 *

SERIES — NO. OF POS. — CONTACT PLATED OPTION — HOUSING COLOR OPTION
BLANK: BLACK
W: WHITE

TIN PLATING ON SOLDER TAIL — TRAY PACKAGE

1: GOLD FLASH
3: 3u" GOLD
5: 5u" GOLD
6: 10u" GOLD
7: 15u" GOLD
9: 30u" GOLD

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+105°C

A	RELEASE	2012.11.15
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	USB CONNECTOR SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	TITLE	USB A TYPE, PCB MOUNT, UPRIGHT, REVERSE TYPE METAL SHIELD, FEMALE				
	DRAWN BY	CHECKED BY	APPROVED BY			
	Janice	Lion	Benson			
10041	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	MM	NONE	A4	2USAV-001	A	1/1