

P.C.B. LAYOUT TOP VIEW ±0.05

MOUNTING HOLE

MATERIALS

- HOUSING: TEFLON (UL 94V-0)
- SHELL: ZINC, GOLD PLATING
- TERMINAL: COPPER ALLOY, GOLD PLATING
- WASHER: IRON, GOLD PLATING
- HEX NUT: ZINC, GOLD PLATING

SPECIFICATION


- DIELECTRIC WITHSTANDING: 1000V AC FOR 5 SECONDS
- CONTACT RESISTANCE: 12m OHMS MAX
- INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
- OPERATION TEMPERATURE: -40°C+85°C
- VSWR 1.433 MAX. UP TO 3GHz
- RETURN LOSS -15dB MAX. UP TO 3GHz

TABLE 1

P/N	A
1	0.93
2	1.73
3	2.23
4	3.13

PART NUMBER:

5BNAD - 7 * 1 - 1 4 0 *

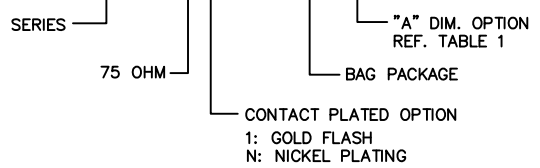

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	RF COAXIAL CONNECTOR SERIES				
X.X ±0.3	TITLE BNC, PCB EDGE MOUNT, VERTICAL, FEMALE, 75 OHM				
X.XX ±0.2	DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1	Janice		Lion		Benson
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
	10101	MM NONE	A4	5BNAD-001	A 1/1

A	RELEASE	2012.4.17
REV.	DESCRIPTION	DATE