



P.C.B LAYOUT
TOP VIEW ±0.05

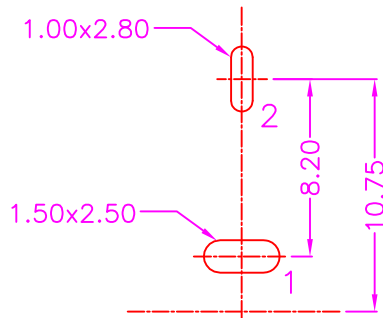

MATERIALS

HOUSING: PBT (UL 94V-0)
 BARREL: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

PART NUMBER:

3RCAA - 0 2 T - 1 1 1 *

SERIES ———
 NO. OF POS. ———
 TIN PLATING ON TERMINAL ———
 TRAY PACKAGE ———
 HOUSING COLOR OPTION
 BLANK: BLACK
 W: WHITE
 G: GREEN
 R: RED
 Y: YELLOW
 RA: ORANGE
 BL: BLUE

A	RELEASE	2012.12.27
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		TITLE				
X.X ±0.3		RCA JACK CONNECTOR SERIES				
X.XX ±0.2		RCA JACK, PCB MOUNT, R/A				
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		<i>Janice</i>		<i>Lion</i>		<i>Benson</i>
		UNIT	SCALE	SIZE	DRAW NO.	REV.
10024		MM	NONE	A4	3RCAA-001	A
					Sheet	
					1/1	