




SECTION A-A

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+105°C

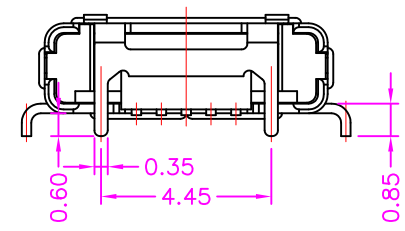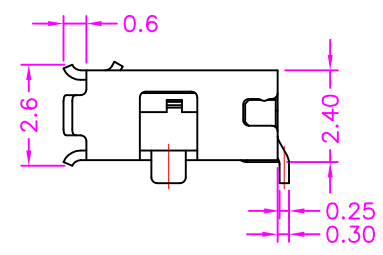
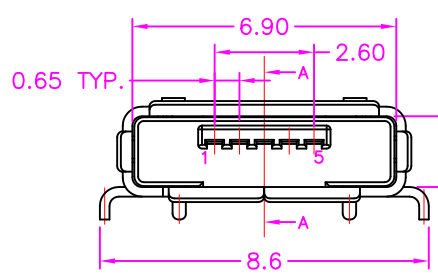


PART NUMBER:
2USUA - 0 5 * T - 1 2 0

SERIES — NO. OF POS. — TAPE REEL PACKAGE

CONTACT PLATED OPTION — TIN PLATING ON SOLDER TAIL

1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD

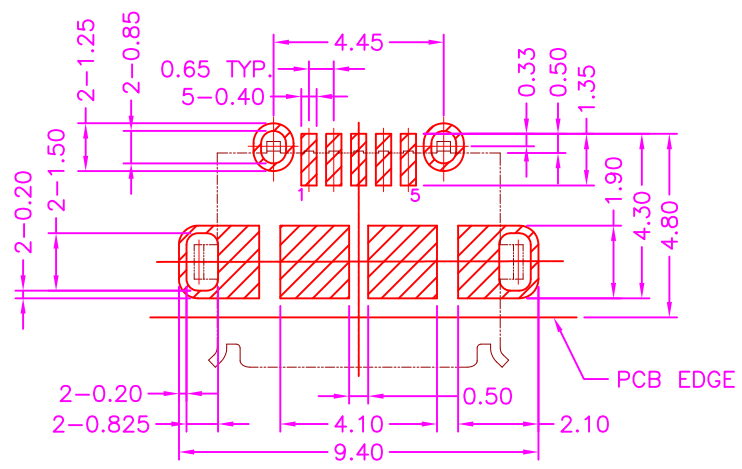

P.C.B LAYOUT
 TOP VIEW ±0.05

A	RELEASE	2009.5.30
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel: +886-3-4951314

TOLERANCES		TITLE			
X.X ±0.3	X.XX ±0.2	USB CONNECTOR SERIES			
X.XXX ±0.1	Angle ±5°	MICRO USB AB TYPE, PCB MOUNT, SMT, METAL SHIELD, FEMALE			
		DRAWN BY	CHECKED BY	APPROVED BY	
		<i>Janice</i>	<i>Lion</i>	<i>Benson</i>	
		UNIT	SCALE	SIZE	DRAW NO.
		10069	MM	A4	2USUA-001
		REV.	Sheet		
		A	1/1		