
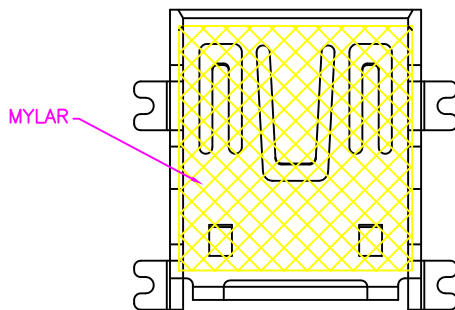


P.C.B. LAYOUT
TOP VIEW ±0.05

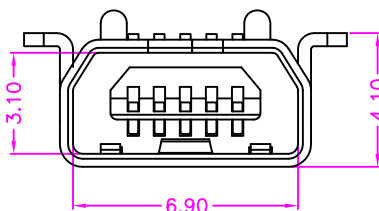

MATERIALS

HOUSING: LCP (UL 94V-0)
SHELL: STEEL, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1 AMP MAX
DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
OPERATION TEMPERATURE: -0°C~+50°C

PART NUMBER:

2USMC - 0 5 * - 1 2 0

SERIES

NO. OF POS.

TAPE REEL PACKAGE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 9: 30u" GOLD



Cyberconn Technology Co., Ltd.

www.cyberconn.com.tw

Tel: +886-3-4951314

| | | | | | | |
|------------|--|----------------------|-----------|-------------|---------------|-----------|
| TOLERANCES | | USB CONNECTOR SERIES | | | | |
| X.X ±0.3 | TITLE MINI USB AB TYPE, PCB MOUNT, R/A, METAL SHIELD FEMALE | DRAWN BY | | CHECKED BY | APPROVED BY | |
| X.XX ±0.2 | | <i>Janice</i> | | <i>Lion</i> | <i>Benson</i> | |
| X.XXX ±0.1 | | UNIT | SCALE | SIZE | DRAW NO. | REV. |
| Angle ±5° | | 10006&10057 | MM | NONE | A4 | 2USMC-001 |
| REV. | | DESCRIPTION | DATE | Sheet | | |
| | | | 2011.10.3 | 1/1 | | |

| | | |
|------|-------------|-----------|
| A | RELEASE | 2011.10.3 |
| REV. | DESCRIPTION | DATE |