
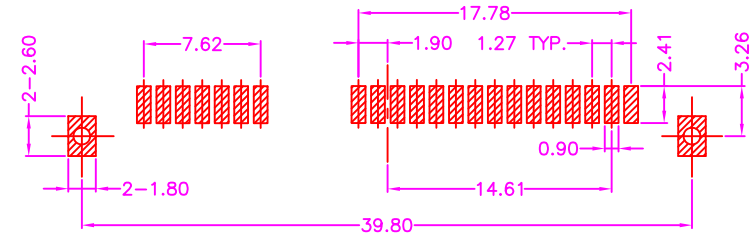
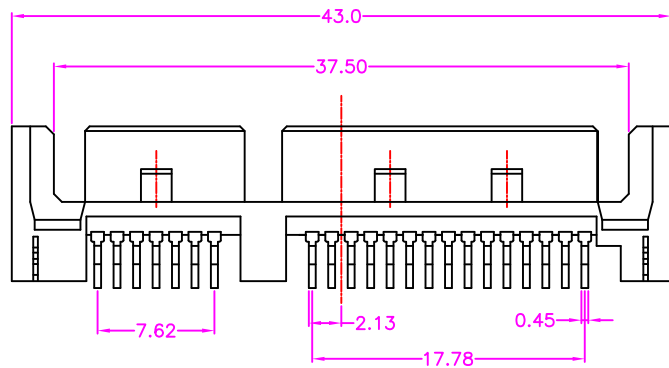



MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 BOARDLOCK: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+105°C

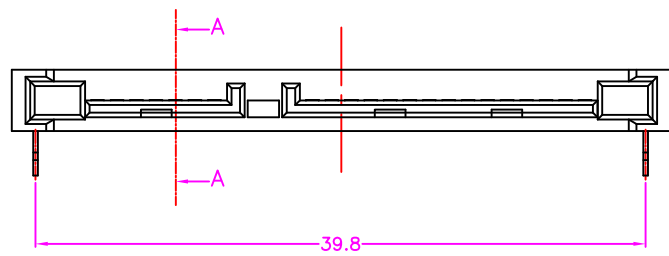

P.C.B LAYOUT
TOP VIEW ±0.05

PART NUMBER:
2SAJH - 2 2 * T - 2 1 1

SERIES — NO. OF POS. — CONTACT PLATED OPTION — TIN PLATING ON SOLDER TAIL — TRAY PACKAGE

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel:+886-3-4951314						
TOLERANCES		SATA CONNECTOR SERIES				
X.X ±0.3		TITLE SATA 7+15 PIN, PCB MOUNT, R/A SMT REVERSE TYPE MALE WITH BOARDLOCK, H=4.00mm				
X.XX ±0.2						
X.XXX ±0.1 Angle ±5°						
DRAWN BY		CHECKED BY		APPROVED BY		
Janice		Lion		Benson		
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10006&10057	MM	NONE	A4	2SAJH-001	A 1/1	

A	RELEASE	2013.1.31
REV.	DESCRIPTION	DATE