
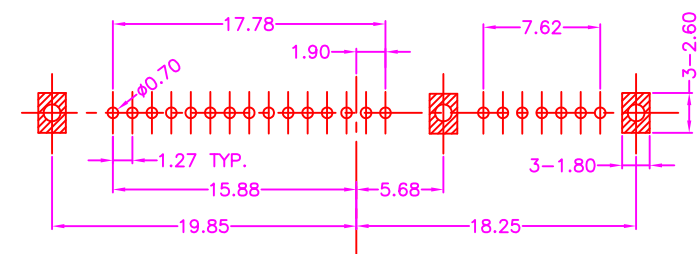
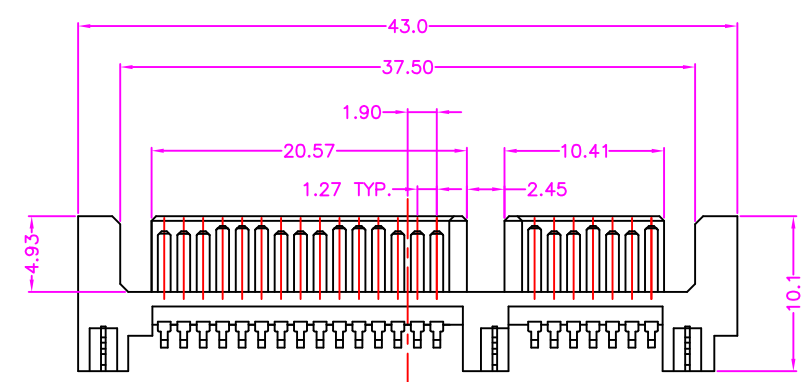



**MATERIALS**  
 HOUSING: LCP (UL 94V-0), BLACK  
 BOARDLOCK: COPPER ALLOY, TIN PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

**SPECIFICATION**  
 CURRENT RATING: 1.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C~+105°C

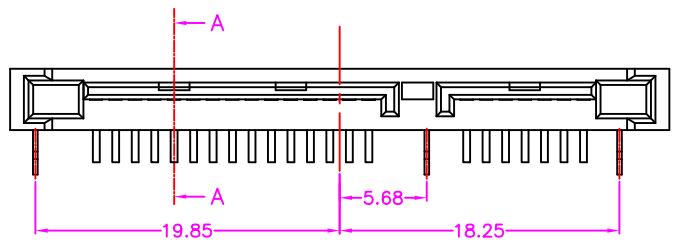

P.C.B LAYOUT  
TOP VIEW ±0.05

PART NUMBER:  
 2SALE - 2 2 \* T - 2 1 1

SERIES — NO. OF POS. — TIN PLATING ON SOLDER TAIL — TRAY PACKAGE

CONTACT PLATED OPTION:  
 1: GOLD FLASH  
 3: 3u" GOLD  
 5: 5u" GOLD  
 6: 10u" GOLD  
 7: 15u" GOLD  
 9: 30u" GOLD

<b>Cyberconn Technology Co., Ltd.</b> www.cyberconn.com.tw Tel:+886-3-4951314						
TOLERANCES		TITLE				
X.X	±0.3	SATA CONNECTOR SERIES				
X.XX	±0.2	SATA 7+15 PIN, PCB MOUNT, R/A, MALE				
X.XXX	±0.1	WITH BOARDLOCK, H=4.00mm				
Angle ±5°		DRAWN BY		CHECKED BY		APPROVED BY
		Janice		Lion		Benson
		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		10006&10057	MM	NONE	A4	2SALE-001 A 1/1

A	RELEASE	2013.1.31
REV.	DESCRIPTION	DATE