
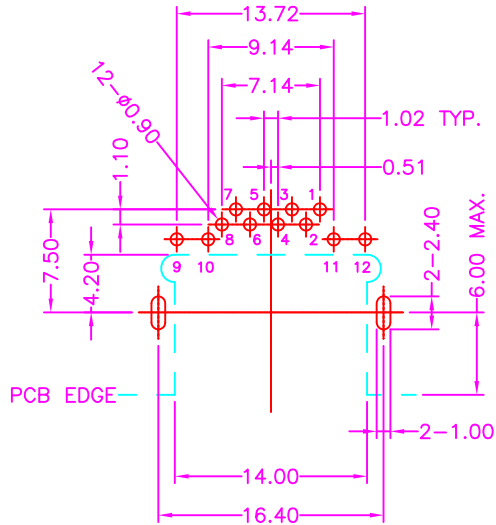
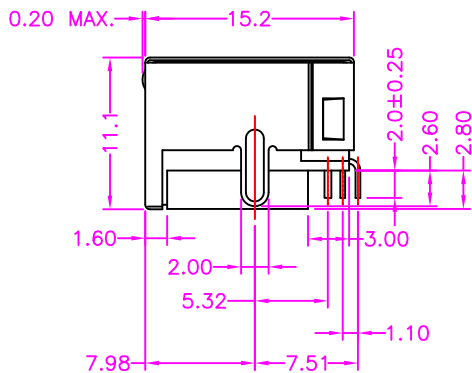



LED 1 GREEN LED 2 YELLOW



LED SCHEMATIC	
GREEN	YELLOW
9+	10-
11+	12-
LED 1	LED 2

PART NUMBER:
3MJBW - 8 8 * - 1 2 2

SERIES TAPE REEL PACKAGE

8 POSITION & 8 CONTACT

- CONTACT PLATED OPTION
- 1: GOLD FLASH
 - 3: 3u" GOLD
 - 5: 5u" GOLD
 - 7: 15u" GOLD
 - 9: 30u" GOLD
 - 11: 6u" GOLD

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
SHELL: COPPER ALLOY, NICKEL PLATING
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

A	RELEASE	2012.12.5
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	MODULAR JACK SERIES					
X.X ±0.3	TITLE RJ45, PCB MOUNT, SIDE ENTRY, METAL SHIELD					
X.XX ±0.2	MID MOUNT, WITH LED					
X.XXX ±0.1	DRAWN BY	CHECKED BY	APPROVED BY			
Angle ±5°	Janice	Lion	Benson			
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10058	MM	NONE	A4	3MJBW-002	A 1/1