
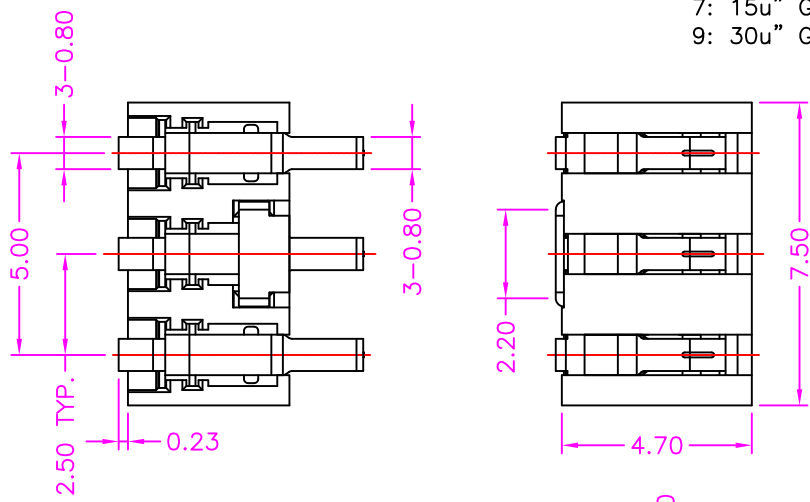


PART NUMBER:
1BTCV - **0** **3** * - **1** **2** **1**

SERIES ————
 NO. OF POS. ————
 CONTACT PLATED OPTION ————

TAPE REEL PACKAGE

- CONTACT PLATED OPTION
- 1: GOLD FLASH
 - 3: 3u" GOLD
 - 5: 5u" GOLD
 - 6: 10u" GOLD
 - 7: 15u" GOLD
 - 9: 30u" GOLD





MATERIALS

HOUSING: LCP (UL 94V-0)
 SOLDER PAD: COPPER ALLOY, TIN PLATED
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 3 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -20°C~+80°C

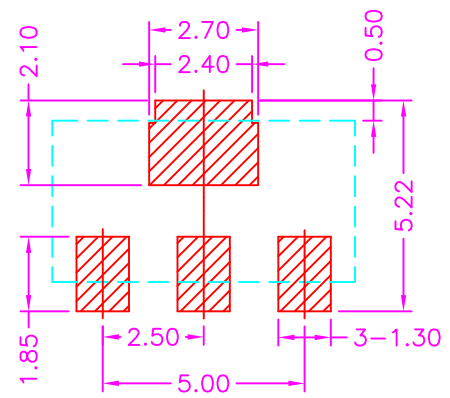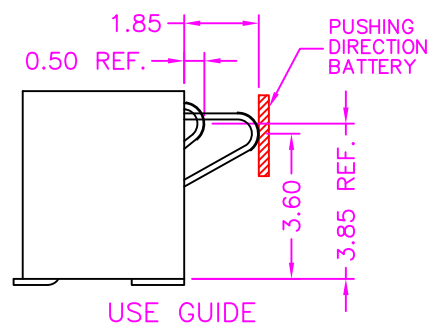

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	BATTERY CONNECTOR SERIES				
X.X ±0.3	TITLE BATTERY, 2.50mm PITCH, PCB MOUNT, R/A SMT, FEMALE WITH PAD				
X.XX ±0.2	DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1	Janice		Lion		Benson
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
	10065	MM	NONE	A4 1BTCV-002	A 1/1

A	RELEASE	2013.3.1
REV.	DESCRIPTION	DATE