
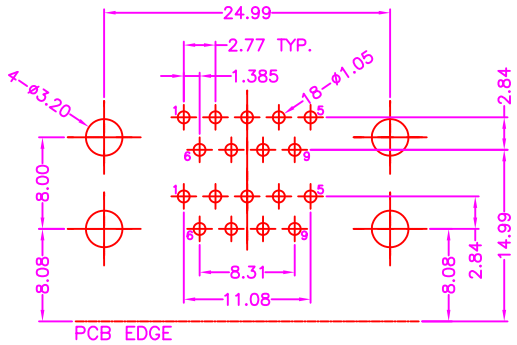


MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0)
 SHELL: SPCC, NICKEL PLATING
 BOARD LOCK: COPPER ALLOY, TIN PLATING
 SCREW: SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL


SPECIFICATION

CURRENT RATING: 5 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C

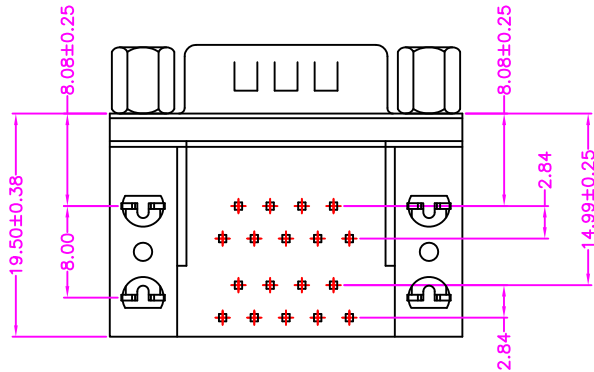

P.C.B LAYOUT TOP VIEW ±0.05

PART NUMBER:

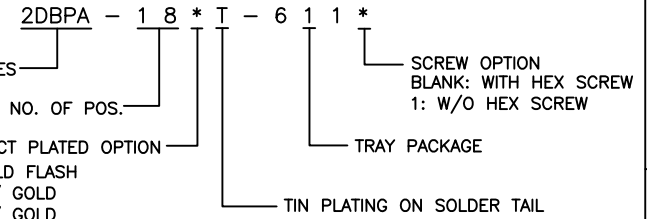

- CONTACT PLATED OPTION
- 1: GOLD FLASH
 - 3: 3u" GOLD
 - 5: 5u" GOLD
 - 6: 10u" GOLD
 - 7: 15u" GOLD
 - 9: 30u" GOLD

<p>Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel+886-3-4951314</p>						
TOLERANCES		D-SUB CONNECTOR SERIES				
X.X ±0.3		TITLE STACKED D-SUB, PCB MOUNT, R/A, METAL SHIELD STAMPED PIN, WITH BOARDLOCK AND SCREW				
X.XX ±0.2		DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1		Janice		Lion		Benson
Angle ±5°						
		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		10037	MM	NONE	A4	2DBPA-001 A 1/1

A	RELEASE	2013.8.6
REV.	DESCRIPTION	DATE