
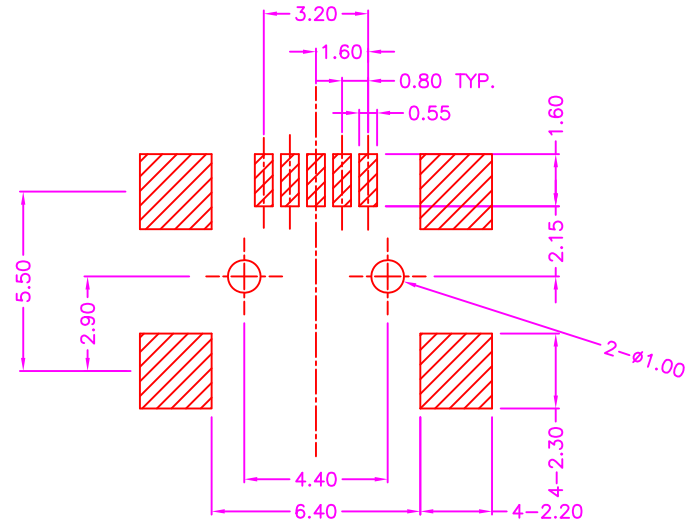


SECTION A-A

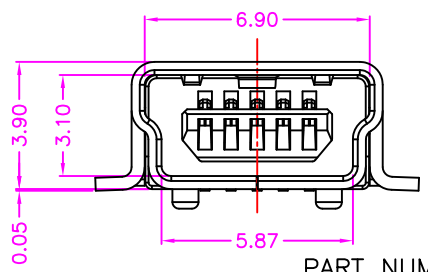

P.C.B. LAYOUT TOP VIEW ±0.05

MATERIALS

HOUSING: LCP (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 100V
 OPERATION TEMPERATURE: -25°C~+85°C

PART NUMBER:

2USMB - 0 5 * T - 1 2 4

SERIES

TAPE REEL PACKAGE

NO. OF POS.

TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 9: 30u" GOLD

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	TITLE	USB CONNECTOR SERIES				
X.X ±0.3	MINI USB B TYPE, PCB MOUNT, SMT, METAL SHIELD FEMALE	DRAWN BY		CHECKED BY	APPROVED BY	
X.XX ±0.2		Janice		Lion	Benson	
X.XXX ±0.1		UNIT	SCALE	SIZE	DRAW NO.	REV.
Angle ±5°	10022	MM	NONE	A4	2USMB-004	A
					Sheet	1/1

A	RELEASE	2012.10.29
REV.	DESCRIPTION	DATE