

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 PAD: STAINLESS STEEL, GOLD PLATING
 SWITCH: COPPER ALLOY, GOLD PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION


CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 60m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

PART NUMBER:

4MCFD - 0 9 * T - 1 * 1


SERIES
 NO. OF POS.
 CONTACT PLATED OPTION
 PACKAGE OPTION
 1: TRAY
 2: TAPE REEL
 TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD

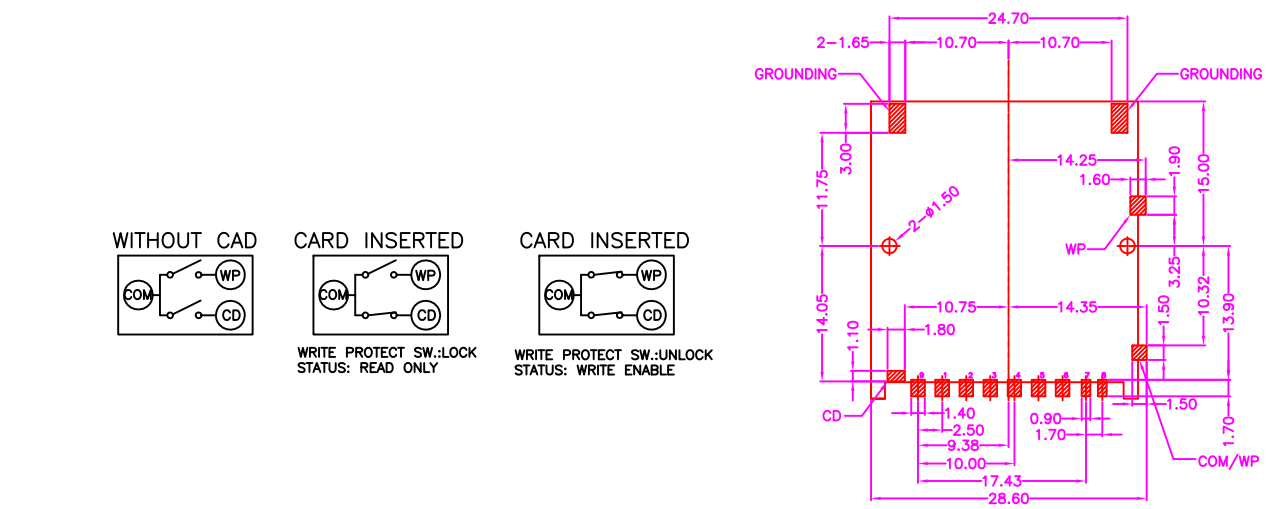


P.C.B. LAYOUT TOP VIEW ±0.05

WITHOUT CAD




CARD INSERTED



WRITE PROTECT SW.:LOCK STATUS: READ ONLY

CARD INSERTED




WRITE PROTECT SW.:UNLOCK STATUS: WRITE ENABLE


A	RELEASE	2011.9.29
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	MEMORY CARD SERIES				
X.X ±0.3	TITLE SD CARD, PCB MOUNT, SMT, METAL SHIELD				
X.XX ±0.2	PUSH-PUSH TYPE, FEMALE				
X.XXX ±0.1	DRAWN BY	CHECKED BY	APPROVED BY		
Angle ±5°	Janice	Lion	Benson		
	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10077	MM	NONE	A4	4MCFD-002
					Sheet
					1/2

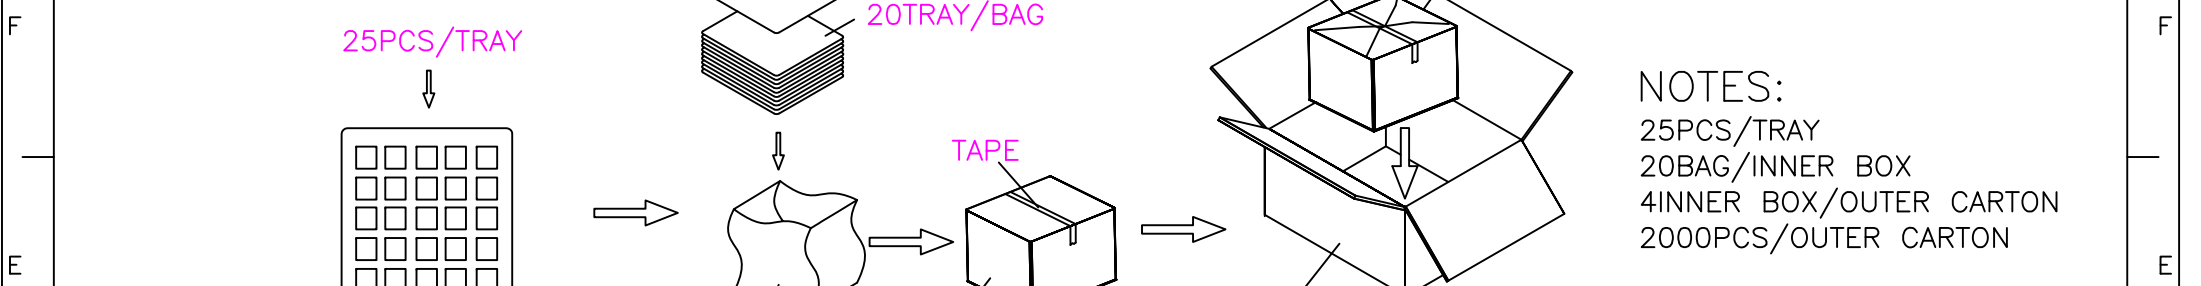

NOTES:
 25PCS/TRAY
 20BAG/INNER BOX
 4INNER BOX/OUTER CARTON
 2000PCS/OUTER CARTON

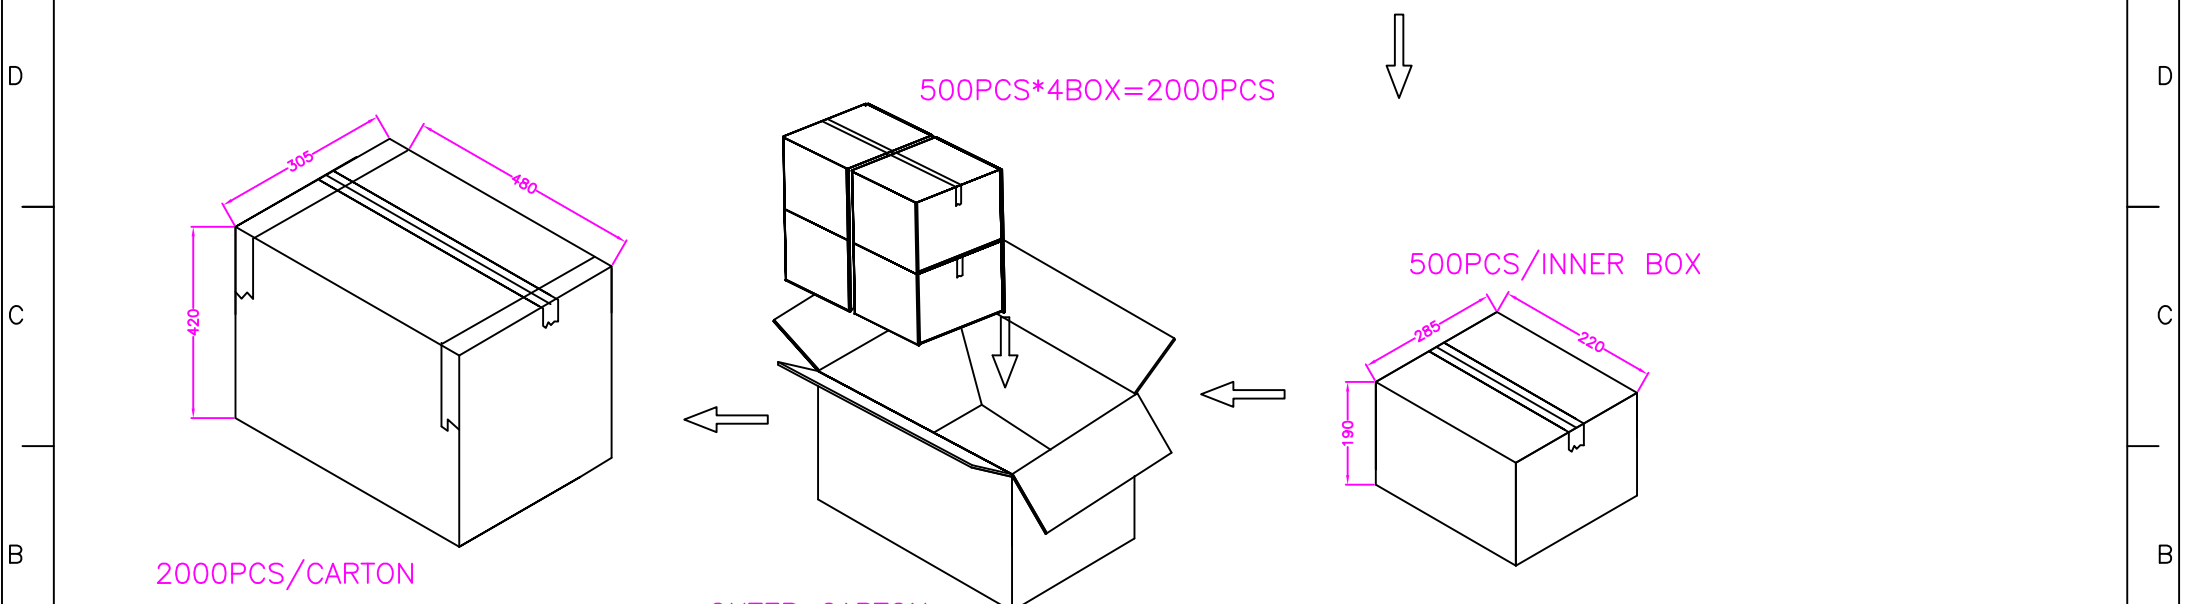

2000PCS/CARTON

OUTER CARTON

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	MEMORY CARD SERIES				
X.X ±0.3	TITLE SD CARD, PCB MOUNT, SMT, METAL SHIELD				
X.XX ±0.2	PUSH-PUSH TYPE, FEMALE				
X.XXX ±0.1	DRAWN BY	CHECKED BY	APPROVED BY		
Angle ±5°	<i>Janice</i>	<i>Lien</i>	<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
	10077	MM	NONE	A4 4MCFD-002-1	A 2/2

A	RELEASE	2011.9.29
REV.	DESCRIPTION	DATE