


MATERIALS

HOUSING: PBT (UL 94V-0)
 BARREL: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

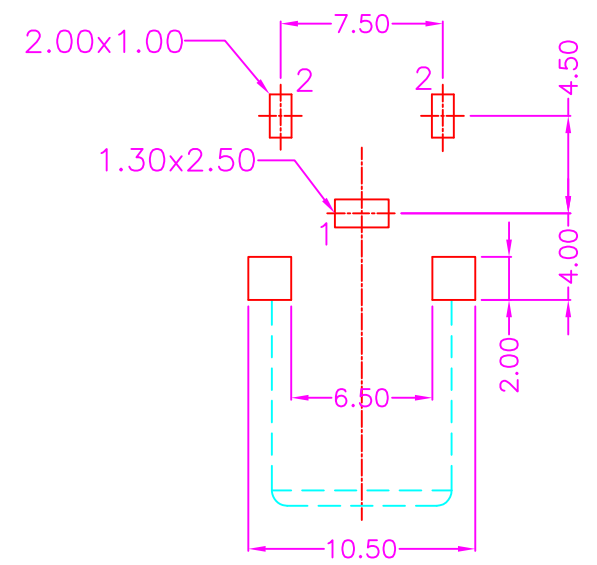


P.C.B. LAYOUT
 TOP VIEW ±0.05

PART NUMBER:
3RCDA - 0 3 T - 1 1 1 *

SERIES ————
 NO. OF POS. ————
 TIN PLATING ON TERMINAL ————
 TRAY PACKAGE ————

HOUSING COLOR OPTION
 BLANK: BLACK
 W: WHITE
 G: GREEN
 R: RED
 Y: YELLOW
 RA: ORANGE
 BL: BLUE



Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel:+886-3-4951314						
TOLERANCES		TITLE				
X.X ±0.3		RCA JACK CONNECTOR SERIES				
X.XX ±0.2		RCA JACK, PCB MOUNT, R/A				
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		Janice		Lion		Benson
		UNIT	SCALE	SIZE	DRAW NO.	REV.
10126		MM	NONE	A4	3RCDA-001	A
					Sheet	
					1/1	

A	RELEASE	2013.10.30
REV.	DESCRIPTION	DATE