
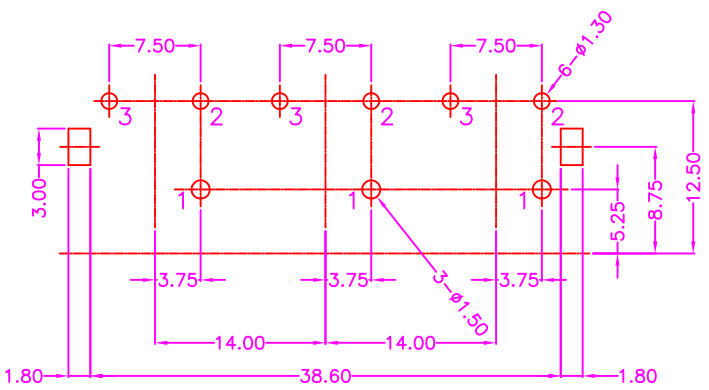


TABLE 1

RING COLOR OPTION			
CODE	A	B	C
A	WHITE	WHITE	ORANGE
B	WHITE	RED	WHITE
C	YELLOW	YELLOW	WHITE
D	RED	WHITE	ORANGE
E	RED	RED	RED
F	YELLOW	YELLOW	RED

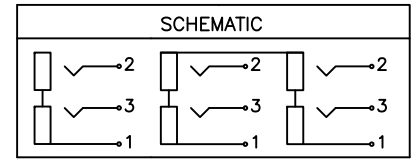

P.C.B LAYOUT  
TOP VIEW ±0.05

PART NUMBER:  
3RCCF - 0 9 T - 1 1 3 \* \*

SERIES  
NO. OF POS.  
TIN PLATING ON TERMINAL

BARREL PLATING OPTION  
BLANK: TIN  
G: GOLD  
N: NICKEL

RING COLOR OPTION  
REF. TABLE 1

TRAY PACKAGE

MATERIALS

1. HOUSING: PBT (UL 94V-0)
2. RING: PBT (UL 94V-0)
3. SHELL: COPPER ALLOY
4. BARREL: COPPER ALLOY
5. TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

CURRENT RATING: 2 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -25°C~+85°C

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel: +886-3-4951314

TOLERANCES	RCA JACK CONNECTOR SERIES					
X.X ±0.3	2x3 STACKED RCA JACK, PCB MOUNT, R/A WITH METAL SHIELD					
X.XX ±0.2	TITLE					
X.XXX ±0.1	DRAWN BY	CHECKED BY	APPROVED BY			
Angle ±5°	Janice	Lion	Benson			
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10126	MM	NONE	A4	3RCCF-003	A 1/1

A	RELEASE	2013.10.30
REV.	DESCRIPTION	DATE