
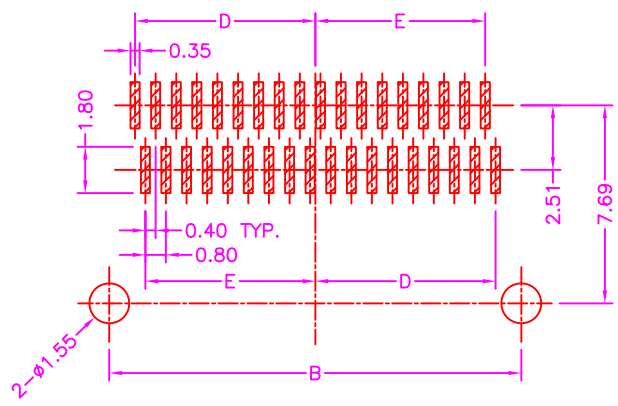
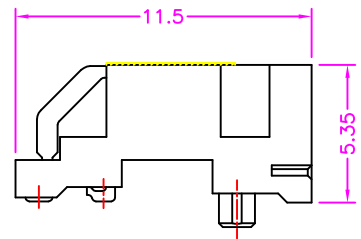


SECTION S-S

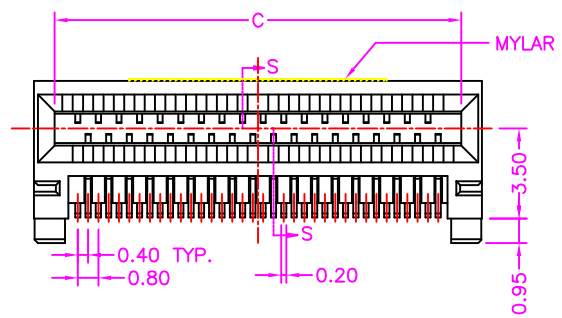

P.C.B LAYOUT
TOP VIEW ±0.05

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 0.5 AMP MAX
DIELECTRIC WITHSTANDING: 300V AC FOR ONE MINUTE
CONTACT RESISTANCE: 80m OHMS MAX
INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -40°C~+85°C

PART NUMBER:

QQCBB - * * * - 1 * 1

SERIES — NO. OF POS. REF. TABLE 1 — PACKAGE OPTION
2: TAPE REEL
3: TUBE

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

TABLE 1

POS. NO.	DIMENSIONS				
	A	B	C	D	E
26	13.40	12.00	11.80	5.00	4.60
36	17.40	16.00	15.80	7.00	6.60
38	18.20	16.80	16.60	7.40	7.00
68	30.20	28.80	28.60	13.40	13.00

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	TITLE	QSFP CONNECTOR SERIES				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°		QSFP CONN., PCB MOUNT, SMT, WITH POST				
	DRAWN BY	CHECKED BY	APPROVED BY			
	Janice	Lion	Benson			
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10139	MM	NONE	A4	QQCBB-001	A 1/1	

A	RELEASE	2013.12.27
REV.	DESCRIPTION	DATE