



0.65 TYP.
2.60

MATERIALS

HOUSING: THERMOPLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+105°C

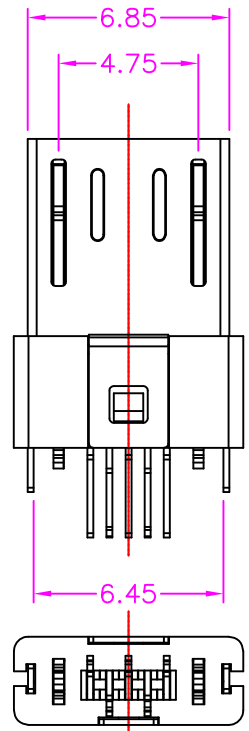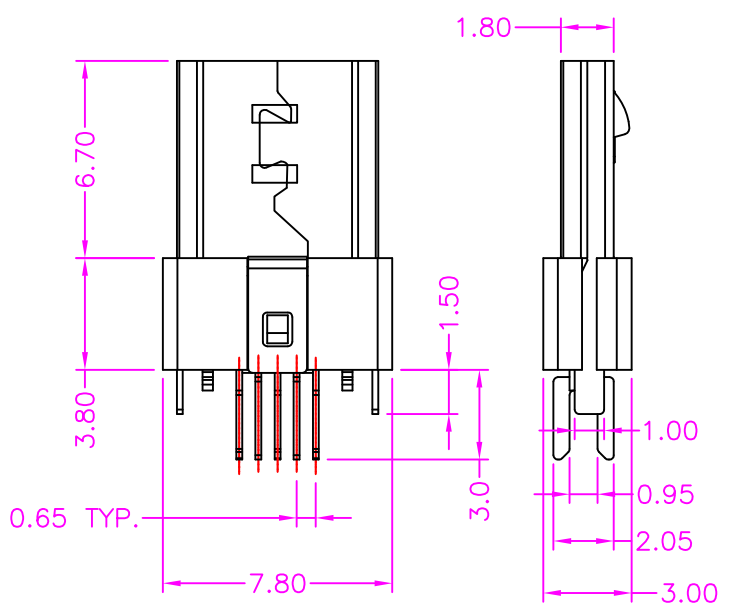


PART NUMBER:

2USTH - 0 5 * T - 2 4 1

SERIES — BAG PACKAGE
 NO. OF POS. — TIN PLATING ON SOLDER TAIL

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

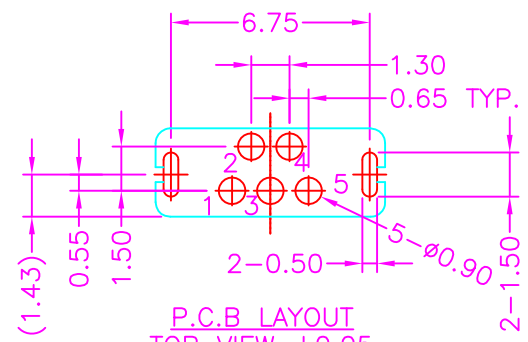

P.C.B. LAYOUT
 TOP VIEW ±0.05

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>							
TOLERANCES		USB CONNECTOR SERIES					
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°		TITLE MICRO USB B TYPE, VERTICAL TYPE, METAL SHIELD PLUG					
		DRAWN BY		CHECKED BY	APPROVED BY		
		<i>Janice</i>		<i>Lion</i>	<i>Benson</i>		
		UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
		10006&10057	MM	NONE	A4	2USTH-001	A 1/1

A	RELEASE	2013.5.17
REV.	DESCRIPTION	DATE