

MATERIALS

HOUSING: LCP (UL 94V-0), BLUE
 SHELL: SPCC, NICKEL PLATING
 BOARD LOCK: SPCC, TIN PLATING
 SCREW: SPCC, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 5 AMP MAX
 DIELECTRIC WITHSTANDING: 1000V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -55°C~+105°C





PART NUMBER:

2DBHD - 1 5 * T 1 - 1 2 2

SERIES: 2DBHD
 NO. OF POS.: 15
 TAPE REEL PACKAGE
 RIVETED & WITH SCREW

CONTACT PLATED OPTION: TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

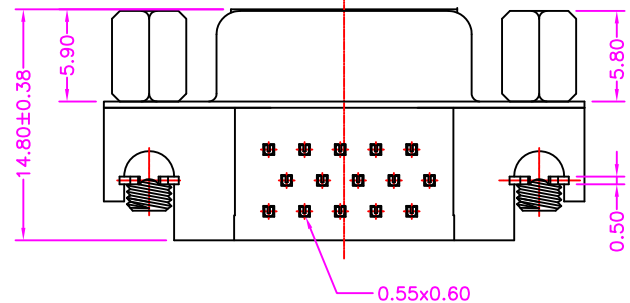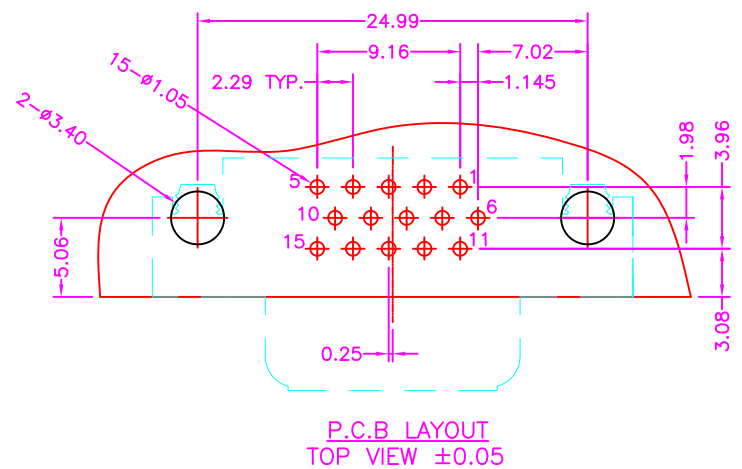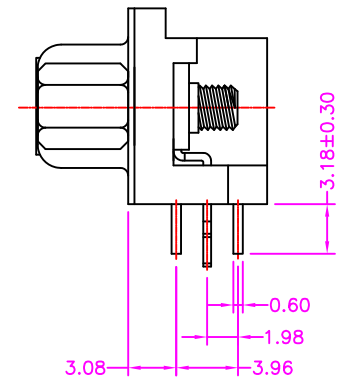
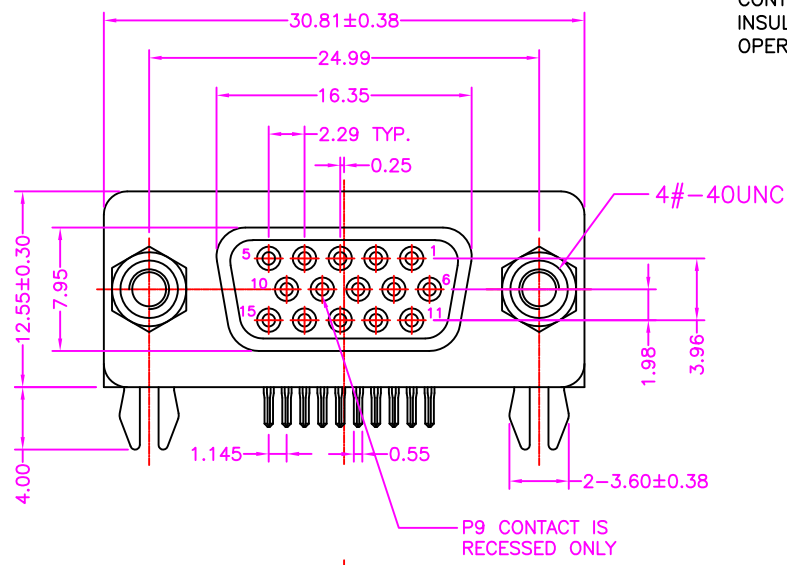


B	ADD. PACKAGE DRAW	2012.8.9
A	RELEASE	2012.7.9
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	D-SUB CONNECTOR SERIES					
X.X ±0.3	TITLE HIGH DENSITY D-SUB, PCB MOUNT, R/A, METAL SHIELD FEMALE, FOOTPRINT 3.08mm, BOARDLOCK AND HEX NUT ASSEMBLY					
X.XX ±0.2	DRAWN BY		CHECKED BY		APPROVED BY	
X.XXX ±0.1	Janice		Lion		Benson	
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10037	MM	NONE	A4	2DBHD-002	B 1/2

CTC 1 2 3 4 5 6 7 8 CTC

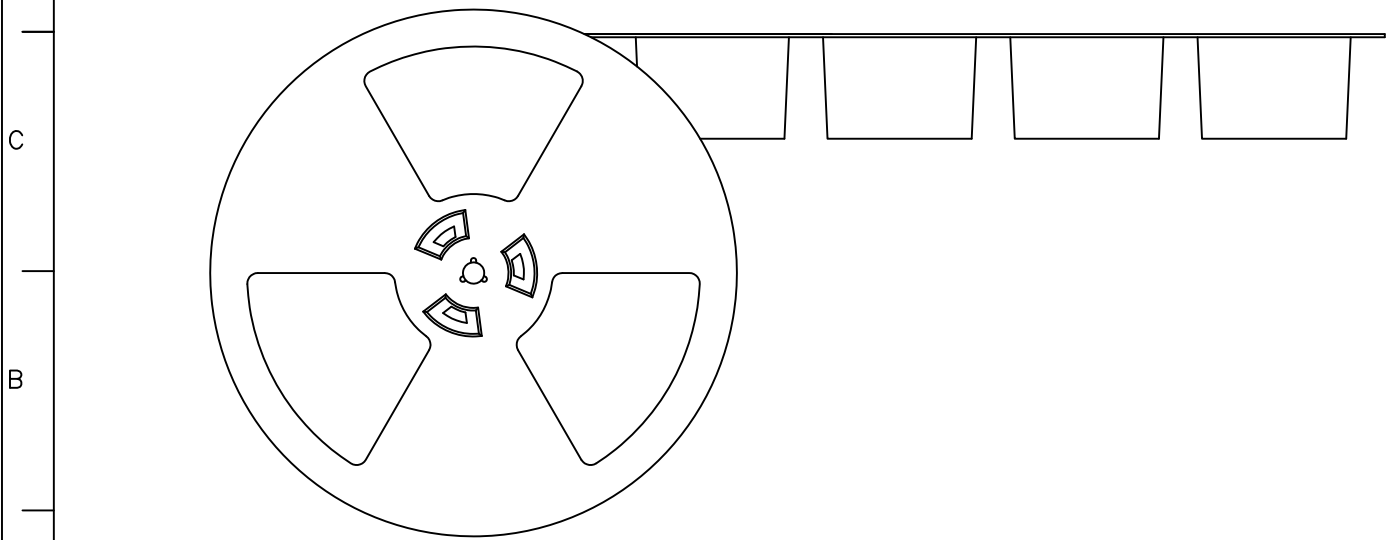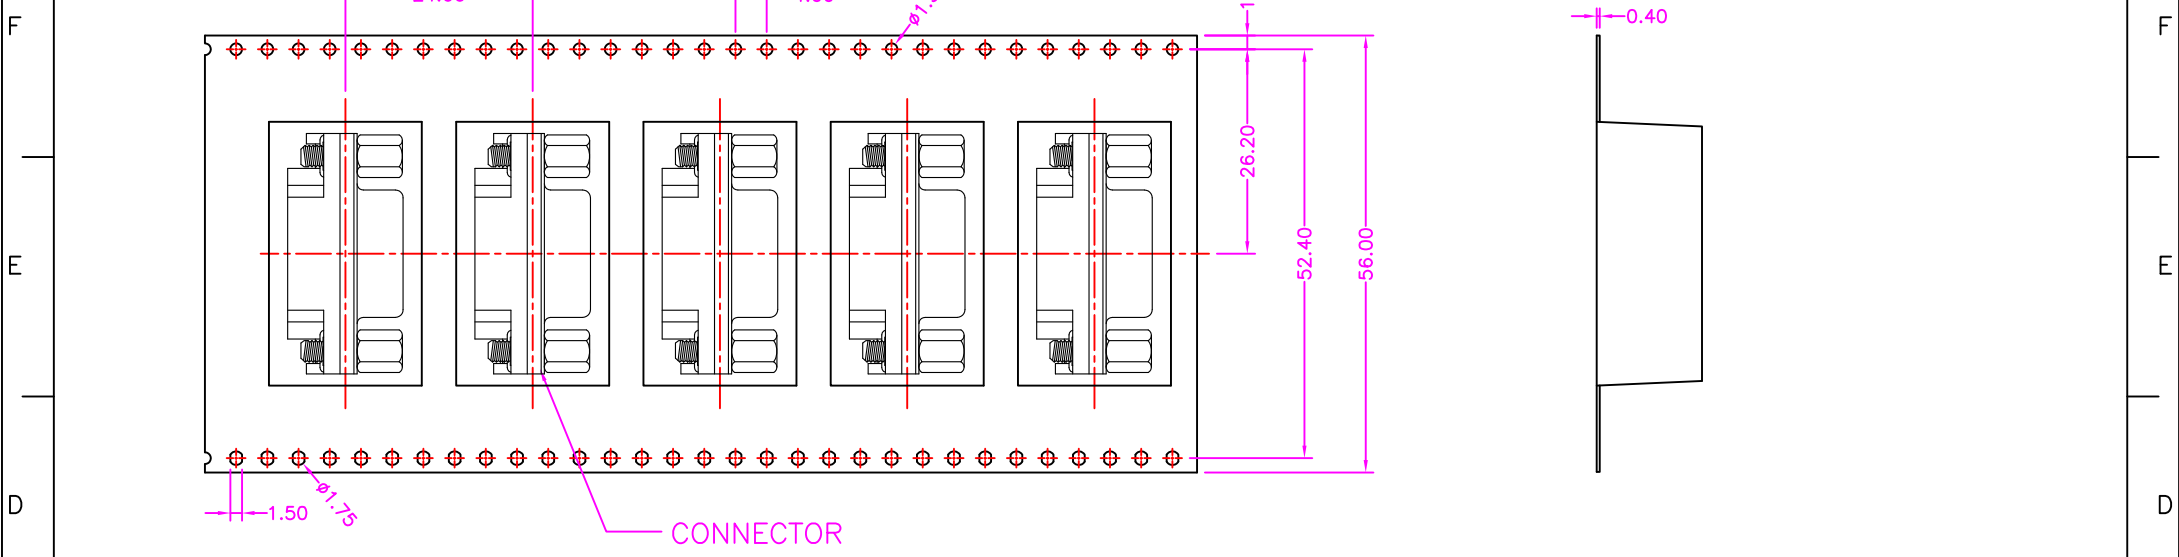

150	4	600
PCS/ TAPE REEL	TAPE REEL/ SHIPPING BOX	PCS/ SHIPPING BOX

B	ADD. PACKAGE DRAW	2012.8.9
A	RELEASE	2012.7.9
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd.
www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	D-SUB CONNECTOR SERIES					
X.X ±0.3	TITLE	HIGH DENSITY D-SUB, PCB MOUNT, R/A, METAL SHIELD FEMALE, FOOTPRINT 3.08mm, BOARDLOCK AND HEX NUT ASSEMBLY				
X.XX ±0.2	DRAWN BY	CHECKED BY		APPROVED BY		
X.XXX ±0.1	<i>Janice</i>	<i>Lion</i>		<i>Benson</i>		
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10037	MM	NONE	A4	2DBHD-002	B 2/2

CTC 1 2 3 4 5 6 7 8 CTC