
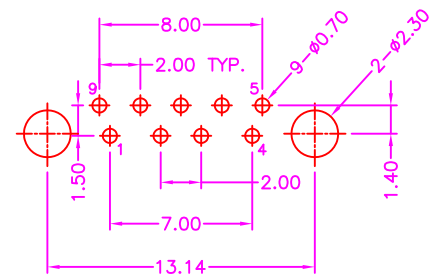
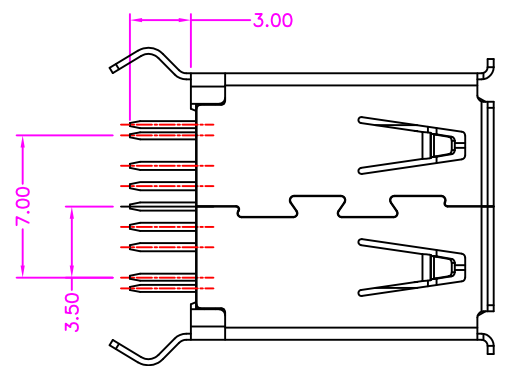
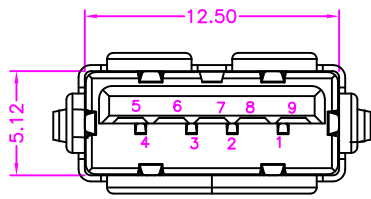
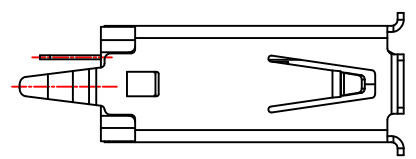


MATERIALS

HOUSING: PBT (UL 94V-0)
 SHELL: COPPER ALLOY, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION

CURRENT RATING: 1.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

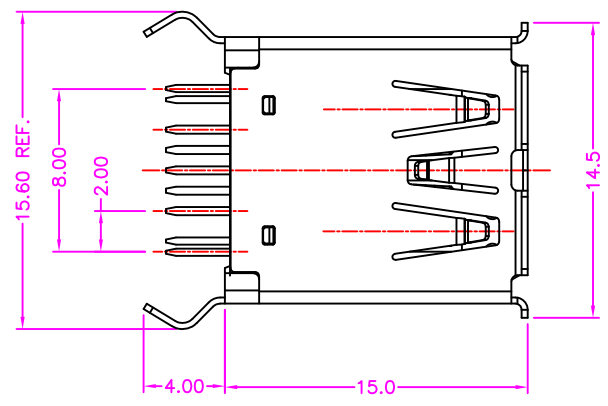

P.C.B LAYOUT
 TOP VIEW ±0.05

PART NUMBER:

2USEA - 0 9 * T - 1 1 2

SERIES ——— TRAY PACKAGE
 NO. OF POS. ——— TIN PLATING ON SOLDER TAIL
 CONTACT PLATED OPTION ———

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

B	MODIFY SHELL	2014.7.28
A	RELEASE	2014.2.7
REV.	DESCRIPTION	DATE

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	USB CONNECTOR SERIES				
X.X ±0.3	TITLE USB 3.0 A TYPE, PCB MOUNT, VERTICAL METAL SHIELD, FEMALE				
X.XX ±0.2	DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1	Tina		Lion		Benson
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.
	MM	NONE	A4	2USEA-002	B
				Sheet	
				1/1	