


P.C.B. LAYOUT
TOP VIEW ±0.05

MATERIALS


HOUSING: PBT (UL 94V-0), BLACK
 INNER PIN: COPPER ALLOY, TIN PLATING
 TERMINAL: COPPER ALLOY, TIN PLATING

SPECIFICATION

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 50m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

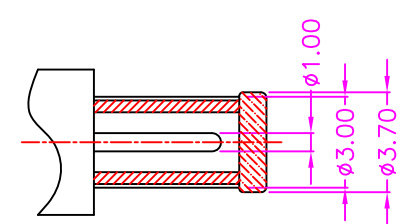

DC MATE PLUG



PART NUMBER:
 3PJAA - 8 - 1 4 2

SERIES — BAG PACKAGE

∅1.00mm INNER PIN

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	DC POWER JACK CONNECTOR SERIES				
X.X ±0.3	TITLE DC POWER JACK, PCB MOUNT, R/A, FEMALEM				
X.XX ±0.2	DRAWN BY	CHECKED BY	APPROVED BY		
X.XXX ±0.1	Janice	Lion	Benson		
Angle ±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.
	10018	MM	NONE	A4	3PJAA-002
					Sheet
					1/1

A	RELEASE	2012.9.27
REV.	DESCRIPTION	DATE