



P.C.B LAYOUT
TOP VIEW ±0.05

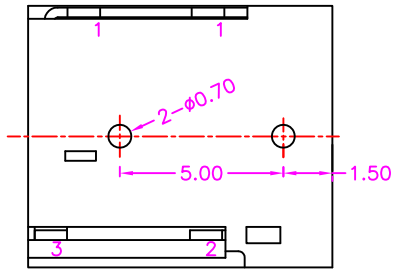

PART NUMBER:
3PJAB - * - 1 4 1

SERIES

BAG PACKAGE

INNER PIN OPTION
7: ø1.30mm
8: ø1.00mm

MATERIALS

HOUSING: PBT (UL 94V-0), BLACK
INNER PIN: COPPER ALLOY, NICKEL PLATING
TERMINAL: 1 & 3 COPPER ALLOY, SILVER PLATING
2 SUS, SILVER PLATING

SPECIFICATION

DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
CONTACT RESISTANCE: 50m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -25°C~+85°C

A	RELEASE	2012.3.17
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		DC POWER JACK CONNECTOR SERIES				
X.X ±0.3		TITLE DC POWER JACK, PCB MOUNT, R/A, FEMALE, WITH POST				
X.XX ±0.2						
X.XXX±0.1 Angle ±5°						
DRAWN BY		CHECKED BY		APPROVED BY		
<i>Janice</i>		<i>Lion</i>		<i>Benson</i>		
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10053	MM	NONE	A4	3PJAB-002	A	1/1