

STANDARD+STANDARD TYPE

**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BEIGE  
 LATCH: STAINLESS STEEL  
 TERMINAL: COPPER ALLOY, GOLD PLATED

**SPECIFICATION**

CURRENT RATING: 0.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 125V AV FOR ONE MINUTE  
 CONTACT RESISTANCE: 60m OHMS MAX  
 INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40~+85°C

**PART NUMBER:**

4MSUV - 2 0 4 \* - 1 1 1

SERIES — TRAY PACKAGE









NO. OF POS. —

CONTACT PLATED OPTION —

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

|  |  |   |       |            |           |             |
|--|--|---|-------|------------|-----------|-------------|
| <p><b>Cyberconn Technology Co., Ltd.</b><br/>                 www.cyberconn.com.tw Tel: +886-3-4951314</p> |  |   |       |            |           |             |
| TOLERANCES   |  | MEMORY SOCKET SERIES  |       |            |           |             |
| X.X ±0.3   |  | TITLE DDR III S.O. DIMM SOCKET 204 PIN, 0.60mm PITCH, PCB MOUNT |       |            |           |             |
| X.XX ±0.2  |  | VERTICAL SMT, WITH LATCH & POST (H=15.00mm)                     |       |            |           |             |
| X.XXX ±0.1   |  | DRAWN BY  |       | CHECKED BY |           | APPROVED BY |
| Angle ±5°  |  | Tina  |       | Lion       |           | Benson      |
|  |  | UNIT  | SCALE | SIZE       | DRAW NO.  | REV. Sheet  |
| 10089  |  | MM  | NONE  | A4         | 4MSUV-001 | A 1/2       |

|      |             |           |
|------|-------------|-----------|
| A    | RELEASE     | 2014.11.6 |
| REV. | DESCRIPTION | DATE      |

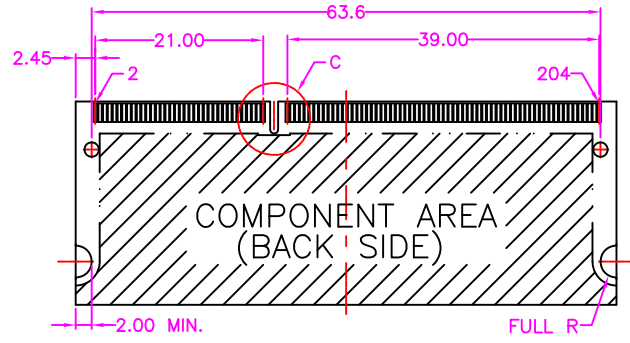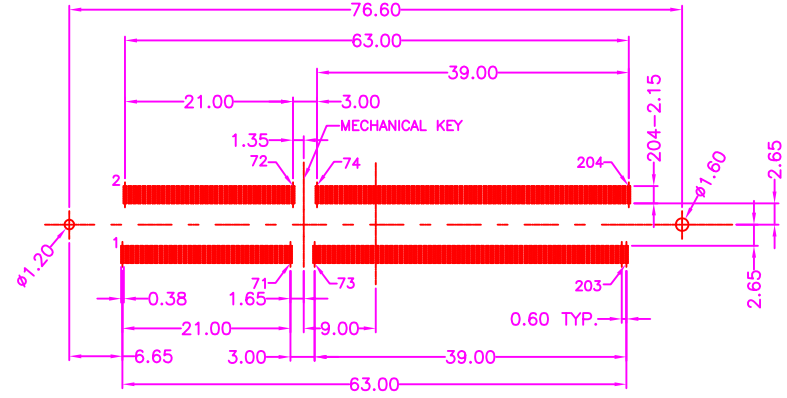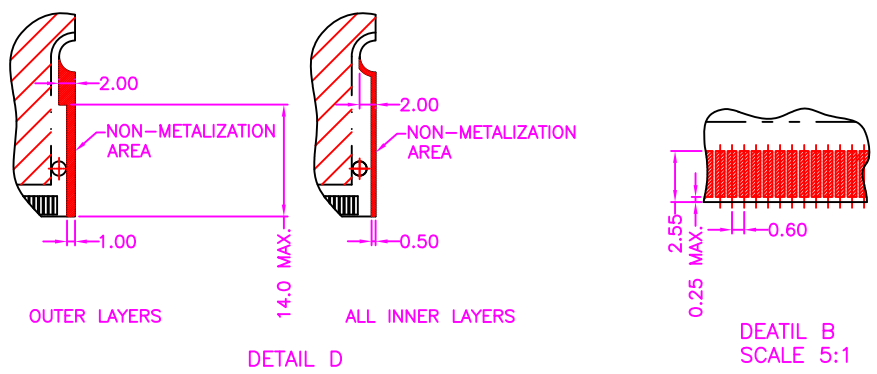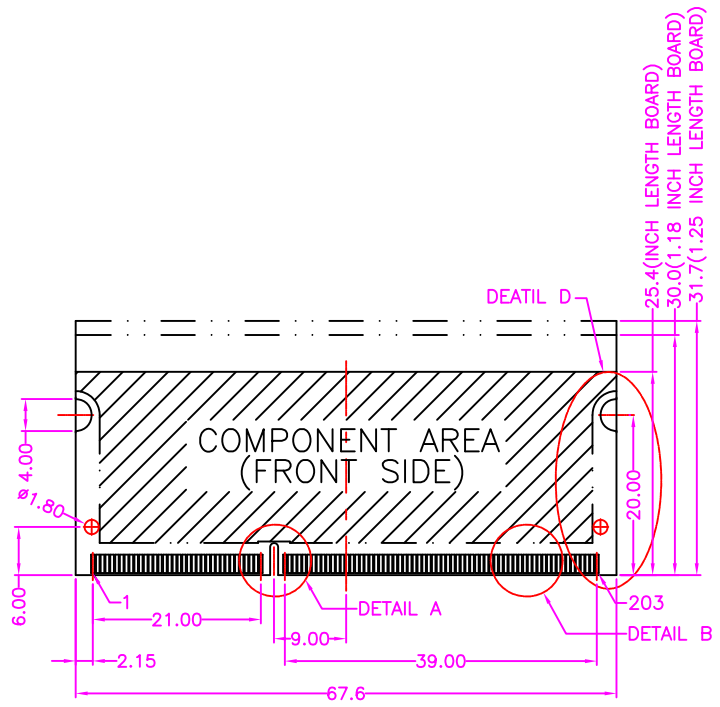

P.C.B LAYOUT TOP VIEW ±0.05

RECOMMENDED MATING PCB BOARD DIM.

|  |  |   |      |            |           |             |     |
|--|--|---|------|------------|-----------|-------------|-----|
| <b>Cyberconn Technology Co., Ltd.</b><br>www.cyberconn.com.tw Tel:+886-3-4951314 |  | MEMORY SOCKET SERIES  |      |            |           |             |     |
|  |  | TITLE DDR III S.O. DIMM SOCKET 204 PIN, 0.60mm PITCH, PCB MOUNT VERTICAL SMT, WITH LATCH & POST (H=15.00mm) |      |            |           |             |     |
| TOLERANCES   |  | DRAWN BY  |      | CHECKED BY |           | APPROVED BY |     |
| X.X ±0.3<br>X.XX ±0.2<br>X.XXX±0.1<br>Angle ±5°                                  |  | Tina  |      | Lion       |           | Benson      |     |
| UNIT   |  | SCALE   | SIZE | DRAW NO.   | REV.      | Sheet       |     |
| 10089  |  | MM  | NONE | A4         | 4MSUV-001 | A           | 2/2 |

|      |             |           |
|------|-------------|-----------|
| A    | RELEASE     | 2014.11.6 |
| REV. | DESCRIPTION | DATE      |