


MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
 SHELL: STAINLESS STEEL, TIN PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+105°C

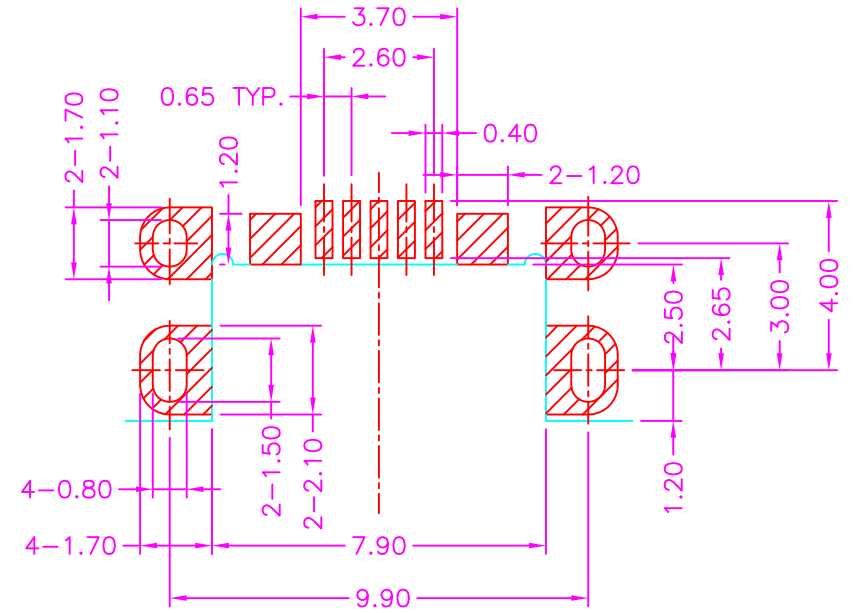

P.C.B. LAYOUT
 TOP VIEW ±0.05

PART NUMBER:
 2USTE - 0 5 * - 1 2 4

SERIES ————
 NO. OF POS. ————
 CONTACT PLATED OPTION ————

1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD

TAPE REEL PACKAGE

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		USB CONNECTOR SERIES				
X.X ±0.3		TITLE MICRO USB B TYPE, PCB MOUNT, SMT, MID MOUNT				
X.XX ±0.2		REVERSE TYPE, METAL SHIELD, FEMALE				
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		Tina		Lion		Benson
		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
10140		MM	NONE	A4	2USTE-004	A 1/1

A	RELEASE	2015.6.26
REV.	DESCRIPTION	DATE