
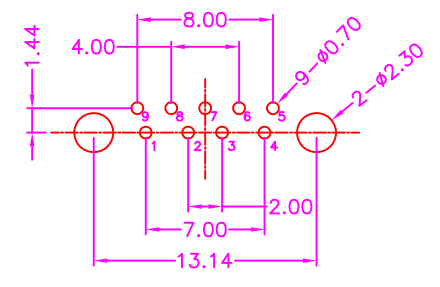


SECTION A-A



P.C.B LAYOUT  
TOP VIEW ±0.05

**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLUE  
 SHELL: COPPER ALLOY OR SUS, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA  
 TIN PLATING ON SOLDER TAIL

**SPECIFICATION**

CURRENT RATING: 1.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 100V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 30m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -40°C ~+85°C


PART NUMBER:

2USEA - 0 9 \* T \* - 1 1 4


SERIES ——— TRAY PACKAGE  
 NO. OF POS. ——— SHELL OPTION  
 CONTACT PLATED OPTION ——— BLANK: COPPER ALLOY  
 S: SUS  
 TIN PLATING ON SOLDER TAIL

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	StdA_SSRX-
6	StdA_SSRX+
7	GND_DRAIN
8	StdA_SSTX-
9	StdA_SSTX+
Shell	Shield



**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES		TITLE				
X.X	±0.3	USB CONNECTOR SERIES USB 3.0 A TYPE, PCB MOUNT, VERTICAL, METAL SHIELD, FEMALE, SHORT BODY, H=11.1mm				
X.XX	±0.2					
X.XXX	±0.1					
Angle ±5°		DRAWN BY	CHECKED BY	APPROVED BY		
		<i>Fina</i>	<i>Lion</i>	<i>Benson</i>		
		UNIT	SCALE	SIZE	DRAW NO.	REV.
10152		MM	NONE	A4	2USEA-004	A 1/1

A	RELEASE	2015.7.31
REV.	DESCRIPTION	DATE