


SECTION A-A

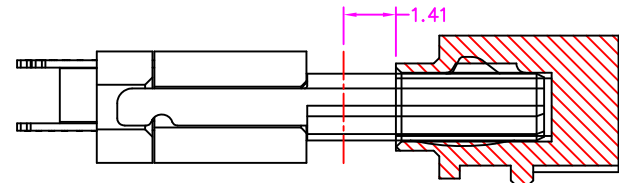

SECTION B-B

ASSEMBLY DRAWING

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0)  
 SHELL: SUS, NICKEL PLATING  
 TERMINAL: COPPER ALLOY, GOLD PLATED

SPECIFICATION

CURRENT RATING: 1.8 AMP MAX (ONLY PIN 1, 5), OTHER 1 AMP MAX  
 DIELECTRIC WITHSTANDING: 250V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 100M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -20°C~+85°C

PART NUMBER:

2USUV - 0 5 \* - 1 2 2


SERIES

TAPE REEL PACKAGE

NO. OF POS.

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

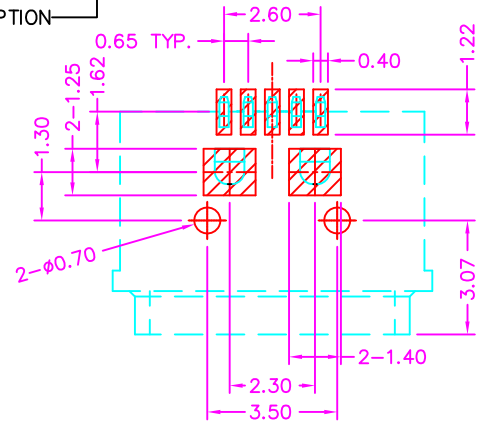

P.C.B LAYOUT TOP VIEW ±0.05

**Cyberconn Technology Co., Ltd.**  
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	USB CONNECTOR SERIES					
X.X ±0.3	TITLE MICRO USB AB TYPE, WATERPROOF, PCB MOUNT, SMT					
X.XX ±0.2	REVERSE TYPE, METAL SHIELD, FEMALE WITH POST					
X.XXX ±0.1	DRAWN BY	CHECKED BY		APPROVED BY		
Angle ±5°	<i>Tina</i>	<i>Lion</i>		<i>Benson</i>		
	UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet
	10140	MM	NONE	A4	2USUV-002	A 1/1

A	RELEASE	2015.6.17
REV.	DESCRIPTION	DATE