
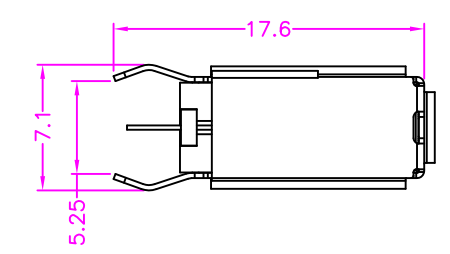
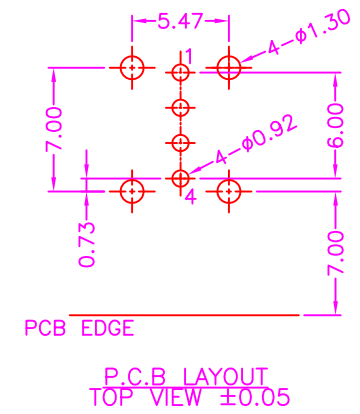
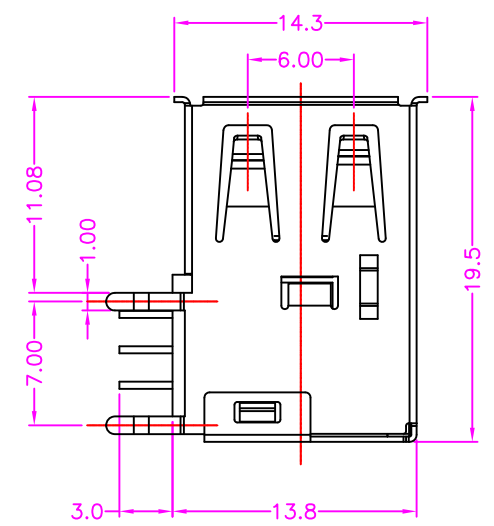
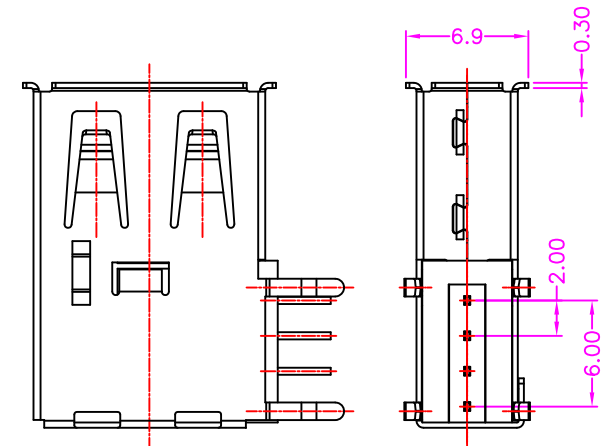


PART NUMBER:
2USAV - 0 4 * T * - 1 1 3

SERIES ————
 NO. OF POS. ————
 CONTACT PLATED OPTION ————

TRAY PACKAGE
 SHELL OPTION
 BLANK: COPPER ALLOY
 S: STEEL
 TIN PLATING ON SOLDER TAIL

1: GOLD FLASH
 3: 3u" GOLD
 5: 5u" GOLD
 6: 10u" GOLD
 7: 15u" GOLD
 9: 30u" GOLD

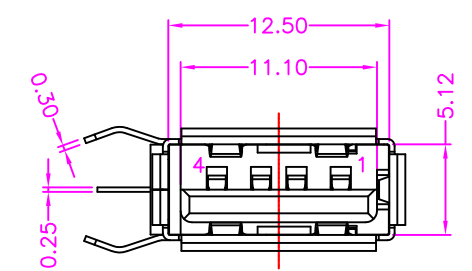

MATERIALS
 HOUSING: HI-TEMP. PLASTIC (UL 94V-0)
 SHELL: COPPER ALLOY OR STEEL, NICKEL PLATING
 TERMINAL: COPPER ALLOY, GOLD PLATED ON CONTACT AREA
 TIN PLATING ON SOLDER TAIL

SPECIFICATION
 CURRENT RATING: 1 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -25°C~+85°C

A	RELEASE	2015.11.13
REV.	DESCRIPTION	DATE

Cyberconn Technology Co., Ltd. www.cyberconn.com.tw Tel:+886-3-4951314						
TOLERANCES		TITLE	USB CONNECTOR SERIES			
X.X	±0.3		USB A TYPE, PCB MOUNT, UPRIGHT REVERSE TYPE, METAL SHIELD, FEMALE			
X.XX	±0.2	DRAWN BY	CHECKED BY	APPROVED BY		
X.XXX	±0.1	<i>Tina</i>	<i>Lion</i>	<i>Benson</i>		
Angle	±5°	UNIT	SCALE	SIZE	DRAW NO.	REV.
		MM	NONE	A4	2USAV-003	A
						Sheet
		10196				1/1