



P.C.B. LAYOUT
TOP VIEW ±0.05

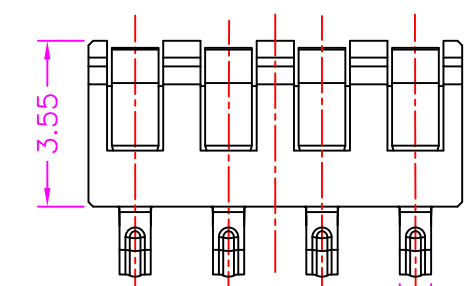

2.00 TYP. 1 4 0.67

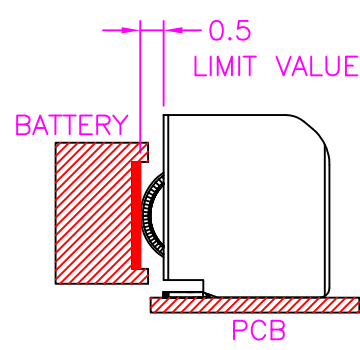

MATERIALS

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), BLACK
TERMINAL: BERYLLIUM COPPER, GOLD PLATED

SPECIFICATION

CURRENT RATING: 2 AMP MAX
DIELECTRIC WITHSTANDING: 50V AC FOR ONE MINUTE
CONTACT RESISTANCE: 30m OHMS MAX
INSULATION RESISTANCE: 500M OHMS MIN AT DC 500V
OPERATION TEMPERATURE: -20°C~+85°C

PART NUMBER:
1BTEU - 0 4 * - 1 2 1

SERIES TAPE REEL PACKAGE

NO. OF POS.

CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		BATTERY CONNECTOR SERIES				
X.X ±0.3		TITLE BATTERY, 2.00mm PITCH, PCB MOUNT, R/A SMT FEMALE				
X.XX ±0.2		DRAWN BY		CHECKED BY		APPROVED BY
X.XXX ±0.1		Tina		Lion		Benson
Angle ±5°		UNIT	SCALE	SIZE	DRAW NO.	REV. Sheet
		10214	MM	NONE	A4 1BTEU-001	A 1/1

A	RELEASE	2016.4.19
REV.	DESCRIPTION	DATE