

**MATERIALS**

HOUSING: HI-TEMP. PLASTIC (UL 94V-0), WHITE  
 TERMINAL: COPPER ALLOY, TIN PLATED

**SPECIFICATION**

CURRENT RATING: 1.5 AMP MAX  
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE  
 CONTACT RESISTANCE: 50m OHMS MAX  
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V  
 OPERATION TEMPERATURE: -20°C~+80°C


PART NUMBER:

1BTJA - T - 0 \* 4

SERIES

TIN PLATING ON TERMINAL

PACKAGE OPTION  
 1: TRAY  
 2: TAPE REEL

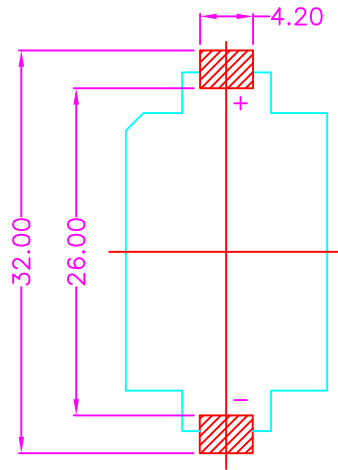

P.C.B. LAYOUT  
 TOP VIEW ±0.05

A	RELEASE	2017.1.5
REV.	DESCRIPTION	DATE

<b>Cyberconn Technology Co., Ltd.</b> www.cyberconn.com.tw Tel: +886-3-4951314						
TOLERANCES		TITLE				
X.X ±0.3		BATTERY CONNECTOR SERIES				
X.XX ±0.2		BATTERY HOLDER, SMT, ALL PLASTIC, CR2032				
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		Tina		Lion		Benson
		UNIT	SCALE	SIZE	DRAW NO.	REV.
		MM	NONE	A4	1BTJA-004	A
					Sheet	
					1/1	