


P.C.B LAYOUT
TOP VIEW ±0.05

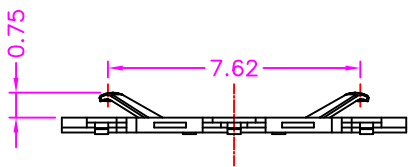

PART NUMBER:
4MCRB - 0 6 * - 1 2 1
 SERIES — NO. OF POS. — TAPE REEL PACKAGE
 CONTACT PLATED OPTION

- 1: GOLD FLASH
- 3: 3u" GOLD
- 5: 5u" GOLD
- 6: 10u" GOLD
- 7: 15u" GOLD
- 9: 30u" GOLD

MATERIALS

HOUSING: LCP (UL 94V-0), BLACK
 TERMINAL: COPPER ALLOY, GOLD PLATING

SPECIFICATION





CURRENT RATING: 0.5 AMP MAX
 DIELECTRIC WITHSTANDING: 500V AC FOR ONE MINUTE
 CONTACT RESISTANCE: 100m OHMS MAX
 INSULATION RESISTANCE: 1000M OHMS MIN AT DC 500V
 OPERATION TEMPERATURE: -40°C~+85°C

PIN No.	FUNCTION
PIN 1	VCC
PIN 2	RST
PIN 3	CLK
PIN 4	GND
PIN 5	VPP
PIN 6	I/O

Cyberconn Technology Co., Ltd.
 www.cyberconn.com.tw Tel:+886-3-4951314

TOLERANCES	TITLE	MEMORY CARD SERIES NANO SIM CARD, 6PIN, PCB MOUNT, SMT FEMALE				
X.X ±0.3 X.XX ±0.2 X.XXX ±0.1 Angle ±5°	DRAWN BY	CHECKED BY	APPROVED BY			
	<i>Tina</i>	<i>Lion</i>	<i>Benson</i>			
UNIT	SCALE	SIZE	DRAW NO.	REV.	Sheet	
10001	MM	NONE	A4	4MCRB-001 A	1/2	

A	RELEASE	2014.2.25
REV.	DESCRIPTION	DATE

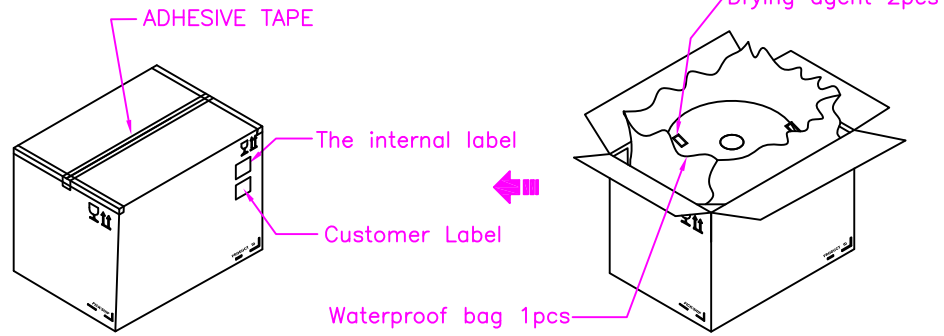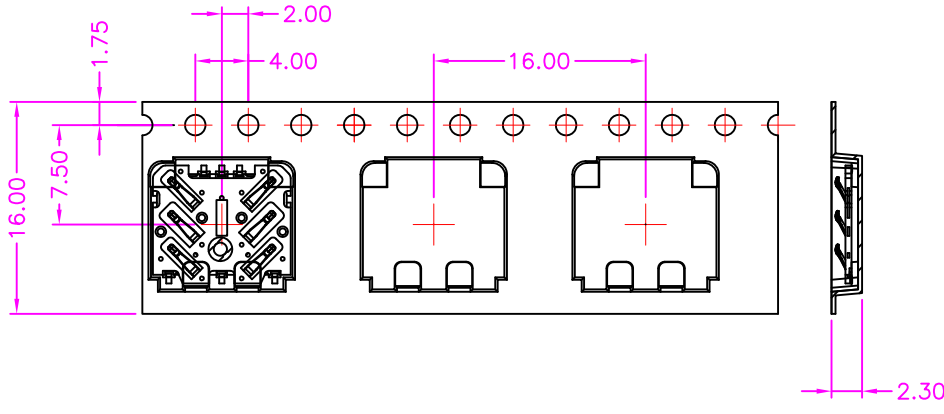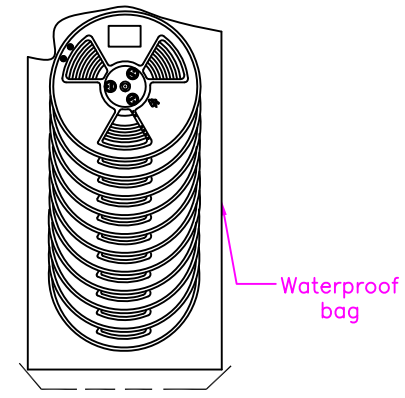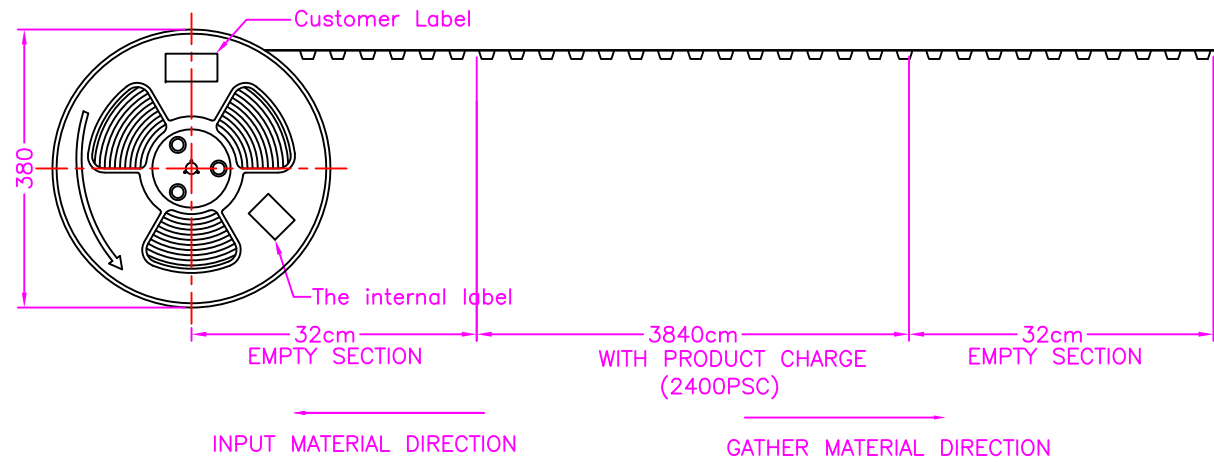

NOTE:
 2400 PCS/REEL
 18 REELS/SHIPPING CARTON
 43200 PCS/SHIPPING CARTON

Cyberconn Technology Co., Ltd. <small>www.cyberconn.com.tw Tel:+886-3-4951314</small>						
TOLERANCES		TITLE				
X.X ±0.3		MEMORY CARD SERIES				
X.XX ±0.2		NANO SIM CARD, 6PIN, PCB MOUNT, SMT				
X.XXX ±0.1		DRAWN BY		CHECKED BY		APPROVED BY
Angle ±5°		Tina		Lion		Benson
		UNIT	SCALE	SIZE	DRAW NO.	REV.
10001		MM	NONE	A4	4MCRB-001	A
					Sheet	2/2

A	RELEASE	2014.2.25
REV.	DESCRIPTION	DATE